


XBA-ARS7 Option Switch Settings

Supported bill ARS 5, 10, 20, 50, 100, 200, 500 7bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
	Reject ARS 5	ON							
★	Accept ARS 5	OFF							
	Reject ARS 10		ON						
★	Accept ARS 10		OFF						
	Reject ARS 20			ON					
★	Accept ARS 20			OFF					
	Reject ARS 50 & 100				ON				
★	Accept ARS 50 & 100				OFF				
	Reject ARS 200 & 500					ON			
★	Accept ARS 200 & 500					OFF			
	Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★	Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
	Stack Banknote when Power-up							ON	
★	Reject Banknote when Power-up							OFF	
	Reserved								ON
★	Reserved								OFF

This dip switch is located at the side of XBA.

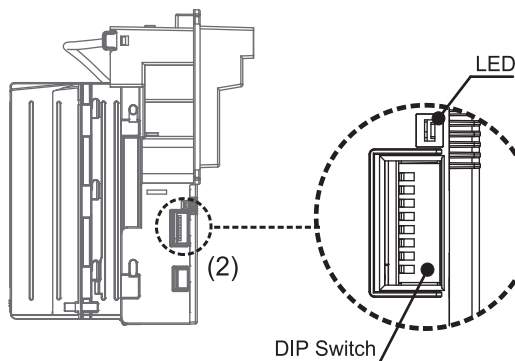


Currency Assign Data

Interface Bill value	ICT104U	ICT104V	Pulse	MDB	Parallel A3
BV1	ARS 5	ARS 5	ARS 5	ARS 5	ARS 5
BV2	ARS 10	ARS 10	ARS 10	ARS 10	ARS 10
BV3	ARS 20	ARS 20	ARS 20	ARS 20	ARS 20
BV4	ARS 50	ARS 50	ARS 50	ARS 50	ARS 50
BV5	ARS 100	ARS 100	ARS 100	ARS 100	
BV6	ARS 200	ARS 200	ARS 200	ARS 200	
BV7	ARS 500	ARS 500	ARS 500	ARS 500	

XBA-ARS7 (Pulse/MDB/ICT104U/Parallel A3/ICT104V)

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
	Inhibit Active HIGH	ON							
★	Inhibit Active LOW	OFF							
	Reserved								
★	Reserved		OFF						
	Reserved			ON					
★	Reserved			OFF					
	Reserved				ON				
★	Reserved				OFF				
	Pulse Mode	MDB Mode			ICT104V Mode				
★	Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2			Connect with coin changer		ON		
	Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0			Connect with ICT VCCS converter board		OFF		
★	Pulse Mode						ON		
	Other Mode						OFF		
	Pulse Mode	Other Mode							
★	1 pulse / ARS 5	MDB Mode							
	2 pulses / ARS 5	Parallel A3 Mode							
	5 pulses / ARS 5	ICT104U Mode							
	20 pulses / ARS 5	ICT104V Mode							

This dip switch is located on the CPU board, remove the CPU board cover first.

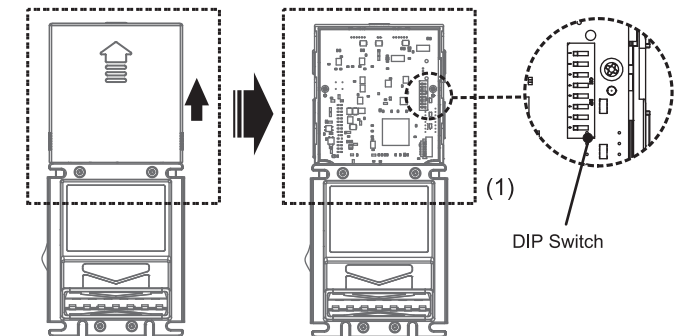

★ Manufacture setting

- Note :
1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
 2. No sleep function.
 3. Bill-acceptor wakes up VMC with banknote only (special cable required)
 4. VMC wakes up bill-acceptor
 5. Bill-acceptor wakes up with banknote or by VMC