

XBA-BYR4 Option Switch Settings

Supported bill **BYR 5, 10, 20, 50** 4 bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject Ruble 5	ON							
★ Accept Ruble 5	OFF							
★ Reject Ruble 10		ON						
★ Accept Ruble 10		OFF						
★ Reject Ruble 20			ON					
★ Accept Ruble 20			OFF					
★ Reject Ruble 50				ON				
★ Accept Ruble 50				OFF				
★ Reserved					ON			
★ Reserved					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ ENABLE IrDA Download								ON
★ Reserved								OFF


★ Manufacture setting

Note: (1) Please reset the bill acceptor after set the dip switch.

(2) Dip switches 1 to 5 are only used for pulse protocol.

(3) Not calibrate card

This dip switch is located at the side of XBA.

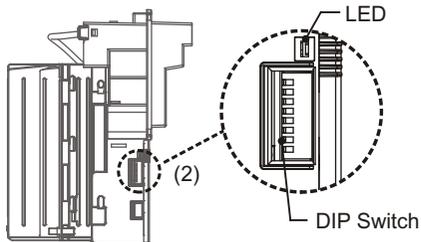

XBA-BYR4 (Pulse/MDB/ICT104U/GPT/ICT104V)

DIP Switch Settings:2

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
Inhibit Active HIGH	ON								
★ Inhibit Active LOW	OFF								
★ ENABLE INHIBIT-Sleep Only		ON							
★ 5 second Timeout Only		OFF							
★ Reserved			ON						
★ Reserved			OFF						
★ Reserved				ON					
★ Reserved				OFF					
Pulse Mode		MDB Mode		ICT104V Mode					
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer				ON		
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT VCCS converter board				OFF		
★ Pulse Mode						ON			
★ Other Mode						OFF			
Pulse Mode		Other Mode							
★ 1 pulse / Ruble 5	MDB Mode							OFF	OFF
★ 5 pulse / Ruble 5	GPT Mode							OFF	ON
★ 10 pulse / Ruble 5	ICT104U Mode							ON	OFF
★ 20 pulse / Ruble 5	ICT104V Mode							ON	ON

★ Manufacture setting

Currency Assign Data

Interface Bill value	Pulse	MDB	ICT104U	ICT104V	GPT
BV1	Ruble 5				
BV2	Ruble 10				
BV3	Ruble 20				
BV4	Ruble 50				

This dip switch is located on the CPU board, remove the CPU board cover first.

