


# XBA-CZK4 Option Switch Settings

Supported bill CZK 100, 200, 500, 1000 4bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject CZK 100	ON							
★ Accept CZK 100	OFF							
★ Reject CZK 200		ON						
★ Accept CZK 200		OFF						
★ Reject CZK 500			ON					
★ Accept CZK 500			OFF					
★ Reject CZK 1000				ON				
★ Accept CZK 1000				OFF				
★ Reserved					ON			
★ Reserved					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

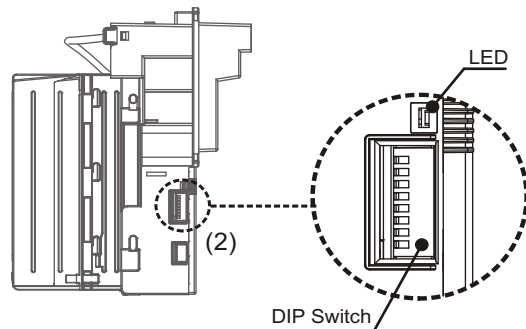


## Currency Assign Data

Interface Bill value	ICT104U	ICT104V	Pulse	MDB
BV1	CZK 100	CZK 100	CZK 100	CZK 100
BV2	CZK 200	CZK 200	CZK 200	CZK 200
BV3	CZK 500	CZK 500	CZK 500	CZK 500
BV4	CZK 1000	CZK 1000	CZK 1000	CZK 1000

# XBA-CZK4 (Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ Reserved		ON						
★ Reserved		OFF						
★ Reserved			ON					
★ Reserved			OFF					
★ Reserved				ON				
★ Reserved				OFF				
	<b>Pulse Mode</b>		<b>MDB Mode</b>		<b>ICT104V Mode</b>			
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer		ON			
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT VCCS converter board		OFF			
★ Pulse Mode					ON			
★ Other Mode					OFF			
	<b>Pulse Mode</b>		<b>Other Mode</b>					
★ 1 pulse / CZK100			MDB Mode			OFF OFF		
★ 2 pulse / CZK100			Reserved			OFF ON		
★ 5 pulse / CZK100			ICT104U Mode			ON OFF		
★ 20 pulse / CZK100			ICT104V Mode			ON ON		

This dip switch is located on the CPU board, remove the CPU board cover first.

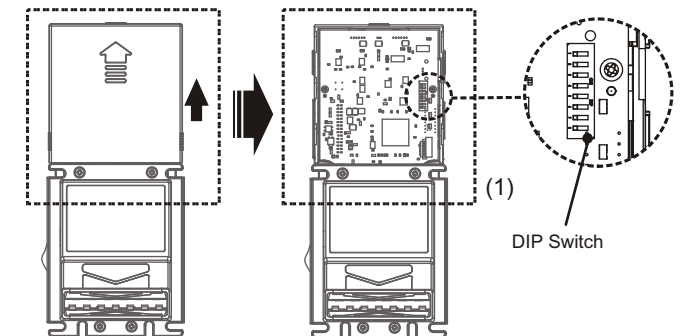

★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note : 1. Please reset the bill acceptor after setting the dip switch.

2. Calibration card is needed