


## XBA-SEK4 Option Switch Settings

Supported bill SKr 20, 50, 100, 200 4bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reject SKr 20	ON							
★	Accept Skr 20	OFF							
★	Reject Skr 50		ON						
★	Accept Skr 50		OFF						
★	Reject Skr 100			ON					
★	Accept Skr 100			OFF					
★	Reject Skr 200				ON				
★	Accept Skr 200				OFF				
★	Reserved				ON				
★	Reserved				OFF				
★	Disable Bill Reject 4 Times BA Stop By 30 Sec					ON			
★	Enable Bill Reject 4 Times BA Stop By 30 Sec					OFF			
★	Stack Banknote when Power-up							ON	
★	Reject Banknote when Power-up							OFF	
★	ENABLE IrDA Download								ON
★	Reserved								OFF

This dip switch is located at the side of XBA.

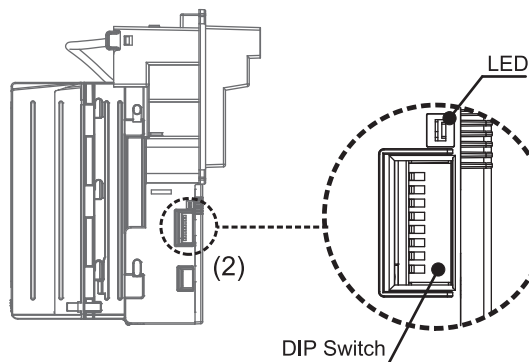


### Currency Assign Data

Interface Bill value	Pulse	MDB	ICT104V	ICT104U	Parallel A3
BV1	SKr 20	SKr 20	SKr 20	SKr 20	SKr 20
BV2	SKr 50	SKr 50	SKr 50	SKr 50	SKr 50
BV3	SKr 100	SKr 100	SKr 100	SKr 100	SKr 100
BV4	SKr 200	SKr 200	SKr 200	SKr 200	SKr 200

## XBA-SEK4 (Pulse/MDB/ICT104U/Parallel A3/ICT104V)

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
★	Inhibit Active HIGH	ON								
	Inhibit Active LOW	OFF								
★	ENABLE INHIBIT-Sleep Only									ON
★	5 second Timeout Only									OFF
★	Reserved			ON						
	Reserved			OFF						
★	Reserved				ON					
	Reserved				OFF					
	Pulse Mode	MDB Mode			ICT104V Mode					
★	Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2			Connect with coin changer	ON				
	Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0			Connect with ICT VCCS converter board	OFF				
★	Pulse Mode						ON			
	Other Mode						OFF			
★	Pulse Mode	Other Mode								
	1 pulse / SKr 10	MDB Mode								
	5 pulses / SKr 10	Parallel A3 Mode								
	10 pulses / SKr 10	ICT104U Mode								
	25 pulses / SKr 10	ICT104V Mode								
							ON	OFF	ON	

This dip switch is located on the CPU board, remove the CPU board cover first.

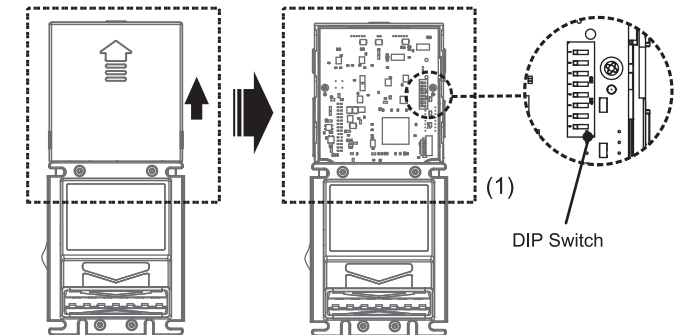

### ★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note : (1) Please reset the bill acceptor after set the dip switch.

(2) Dip switches 1 to 5 are only used for pulse protocol.

(3) Calibration card is needed.

(4) The transaction Record can be saved by USB MSD(only for EX series).