


## XBA-AOA4

### XBA Option Switch Settings(Pulse/MDB/ICT104U/ICT104V)

Supported bill AOA 200, 500, 1000, 2000 4bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reject AOA 200	ON							
★	Accept AOA 200	OFF							
★	Reject AOA 500		ON						
★	Accept AOA 500		OFF						
★	Reject AOA 1000			ON					
★	Accept AOA 1000			OFF					
★	Reject AOA 2000				ON				
★	Accept AOA 2000				OFF				
★	Reserved				ON				
★	Reserved				OFF				
★	Disable Bill Reject 4 Times BA Stop By 30 Sec					ON			
★	Enable Bill Reject 4 Times BA Stop By 30 Sec					OFF			
★	Stack Banknote when Power-up						ON		
★	Reject Banknote when Power-up						OFF		
★	Reserved							ON	
★	Reserved							OFF	

This dip switch is located at the side of XBA.

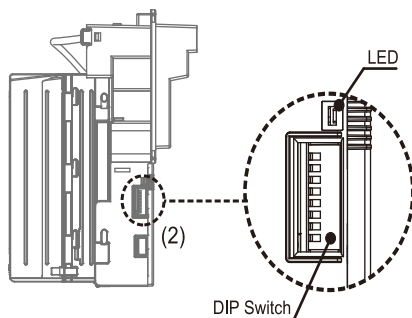


### Currency Assign Data

Interface Bill value	ICT104U	ICT104V	Pulse	MDB
BV1	AOA 200	AOA 200	AOA 200	AOA 200
BV2	AOA 500	AOA 500	AOA 500	AOA 500
BV3	AOA 1000	AOA 1000	AOA 1000	AOA 1000
BV4	AOA 2000	AOA 2000	AOA 2000	AOA 2000

## XBA-AOA4 (Pulse/MDB/ICT104U/ICT104V)

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
	Inhibit Active HIGH	ON								
★	Inhibit Active LOW	OFF								
	Reserved		ON							
★	Reserved		OFF							
	Reserved			ON						
★	Reserved			OFF						
	Reserved				ON					
★	Reserved				OFF					
★	<b>Pulse Mode</b>	<b>MDB Mode</b>			<b>ICT104V Mode</b>					
★	Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2			Connect with coin changer		ON			
	Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0			Connect with ICT JPSTD converter board		OFF			
★	Pulse Mode						ON			
	Other Mode						OFF			
★	<b>Pulse Mode</b>	<b>Other Mode</b>								
	1 pulse / AOA 100	MDB Mode							OFF	OFF
	2 pulse / AOA 100	Reserved							OFF	ON
	5 pulse / AOA 100	ICT104U Mode							ON	OFF
	20 pulse / AOA 100	ICT104V Mode							ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

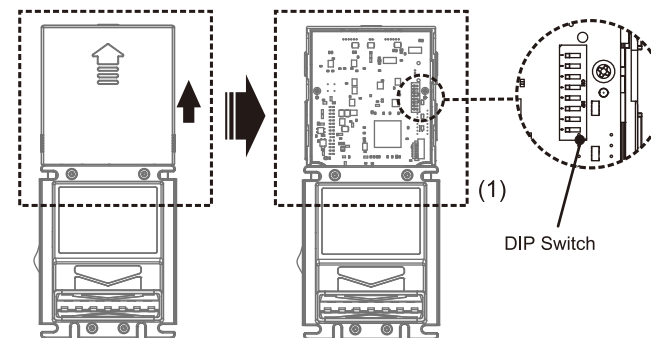

#### ★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note : 1.Calibration card is needed.

2.No sleep function.