


## XBA-ARS7 Option Switch Settings

Supported bill ARS 5, 10, 20, 50, 100, 200, 500 7bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reject ARS 5	ON							
★	Accept ARS 5	OFF							
★	Reject ARS 10								
★	Accept ARS 10								
★	Reject ARS 20		ON						
★	Accept ARS 20		OFF						
★	Reject ARS 50 & 100			ON					
★	Accept ARS 50 & 100			OFF					
★	Reject ARS 200 & 500				ON				
★	Accept ARS 200 & 500				OFF				
★	Disable Bill Reject 4 Times BA Stop By 30 Sec					ON			
★	Enable Bill Reject 4 Times BA Stop By 30 Sec					OFF			
★	Stack Banknote when Power-up						ON		
★	Reject Banknote when Power-up						OFF		
★	Reserved							ON	
★	Reserved							OFF	

This dip switch is located at the side of XBA.

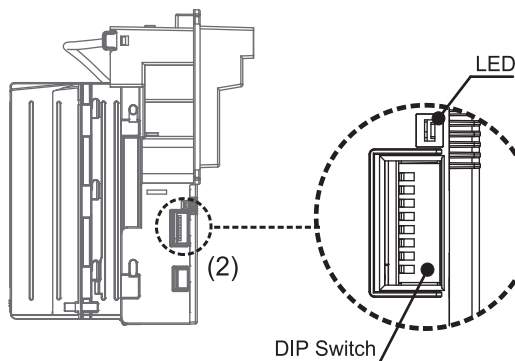

### Currency Assign Data

Interface Bill value	ICT104U	ICT104V	Pulse	MDB
BV1	ARS 5	ARS 5	ARS 5	ARS 5
BV2	ARS 10	ARS 10	ARS 10	ARS 10
BV3	ARS 20	ARS 20	ARS 20	ARS 20
BV4	ARS 50	ARS 50	ARS 50	ARS 50
BV5	ARS 100	ARS 100	ARS 100	ARS 100
BV6	ARS 200	ARS 200	ARS 200	ARS 200
BV7	ARS 500	ARS 500	ARS 500	ARS 500

## XBA-ARS7 (Pulse/MDB/ICT104U/ICT104V)

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Inhibit Active HIGH	ON							
	Inhibit Active LOW	OFF							
★	Reserved		ON						
	Reserved		OFF						
★	Reserved			ON					
	Reserved			OFF					
★	Reserved				ON				
	Reserved				OFF				
★	<b>Pulse Mode</b>	<b>MDB Mode</b>			<b>ICT104V Mode</b>				
	Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2			Connect with coin changer		ON		
	Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0			Connect with ICT VCCS converter board		OFF		
	★	Pulse Mode						ON	
★	Other Mode						OFF		
	<b>Pulse Mode</b>	<b>Other Mode</b>							
	1 pulse / ARS 5	MDB Mode							
	2 pulses / ARS 5	Reserved							
	5 pulses / ARS 5	ICT104U Mode							
	20 pulses / ARS 5	ICT104V Mode							

### ★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note : 1. Calibration card is needed.

This dip switch is located on the CPU board, remove the CPU board cover first.

