


XBA-BYN6 Option Switch Settings

Supported bill BYN 5, 10, 20, 50, 100, 200 6bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject BYN 5 & 10	ON							
★ Accept BYN 5 & 10	OFF							
★ Reject BYN 20		ON						
★ Accept BYN 20		OFF						
★ Reject BYN 50			ON					
★ Accept BYN 50			OFF					
★ Reject BYN 100				ON				
★ Accept BYN 100				OFF				
★ Reject BYN 200					ON			
★ Accept BYN 200					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

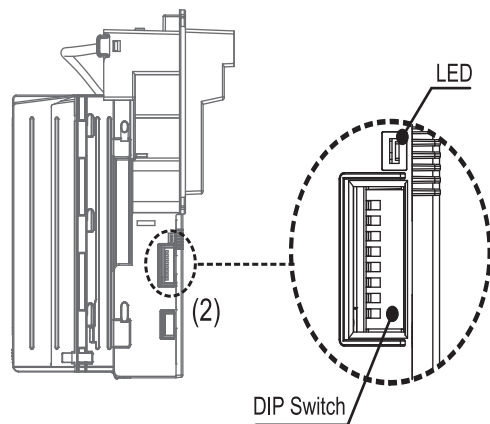

Currency Assign Data

Interface	Pulse	RS232 A0	ICT104U	ccNet	MDB
BV1	BYN 5	BYN 5	BYN 5	BYN 5	BYN 5
BV2	BYN 10	BYN 10	BYN 10	BYN 10	BYN 10
BV3	BYN 20	BYN 20	BYN 20	BYN 20	BYN 20
BV4	BYN 50	BYN 50	BYN 50	BYN 50	BYN 50
BV5	BYN 100	BYN 100	BYN 100	BYN 100	BYN 100
BV6	BYN 200	BYN 200	BYN 200	BYN 200	BYN 200

RS232 A0 INFORMATION

BillType Data	
Code	Denomination
1	Reserved
2	BYN 5
3	BYN 10
4	BYN 20
5	BYN 50
6	BYN 100
7	BYN 200


Appendix

XBA-BYN6 (Pulse/MDB/RS232 A0/ccNet/ICT104U)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
Inhibit Active HIGH	ON								
★ Inhibit Active LOW	OFF								
★ Reserved		ON							
★ Reserved		OFF							
★ Reserved			ON						
★ Reserved			OFF						
★ Reserved				ON					
★ Reserved				OFF					
Pulse Mode	MDB Mode		ccNet Mode						
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position(DPP) = 2		9600 Baud Rate			ON			
Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position(DPP) = 0		19200 Baud Rate			OFF			
★ Pulse Mode						ON			
Other Mode						OFF			
★ 1 pulse / BYN 5	MDB Mode							OFF	OFF
5 pulses / BYN 5	RS232 A0 Mode							OFF	ON
10 pulses / BYN 5	ccNet Mode							ON	OFF
★ 50 pulses / BYN 5	ICT104U Mode							ON	ON

★ Manufacture setting

This dip switch is located on the CPU board, remove the CPU board cover first.

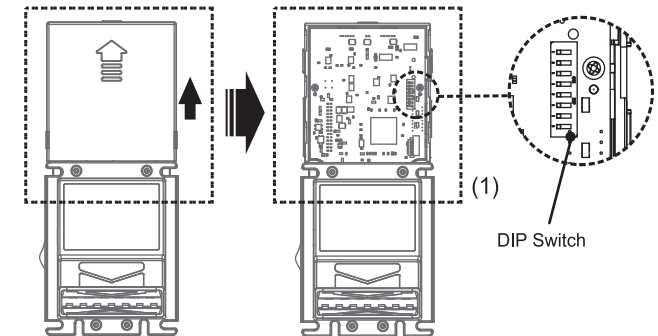

Note : (1) Please reset the bill acceptor after set the dip switch.
 (2) Dip switches 1 to 5 are only used for pulse protocol.
 (3) Calibration card is needed.