


XBA-CH&10(CHF4+EUR4+GBP2) Option Switch Settings

Supported bill Fr 10, 20, 50, 100 4bills.
 € 5, 10, 20, 50 4bills.
 £ 5, 10 2bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject Fr 10 & 20	ON							
★ Accept Fr 10 & 20	OFF							
★ Reject Fr 50 & 100		ON						
★ Accept Fr 50 & 100		OFF						
★ Reject € 5 & 10			ON					
★ Accept € 5 & 10			OFF					
★ Reject € 20 & 50				ON				
★ Accept € 20 & 50				OFF				
★ Reject £ 5 & 10					ON			
★ Accept £ 5 & 10					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

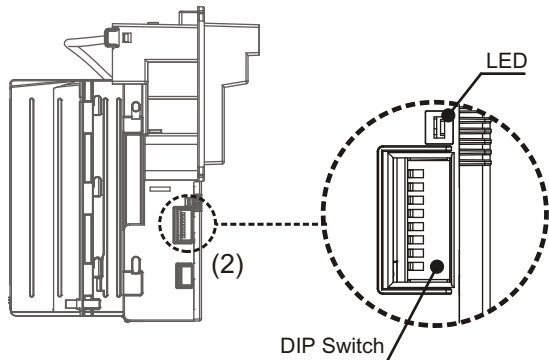


Currency Assign Data

Interface Bill value	ICT104U	GPT	ICT104V	Pulse	MDB
BV1	Fr 10	Fr 10	Fr 10	Fr 10	Fr 10
BV2	Fr 20	Fr 20	Fr 20	Fr 20	Fr 20
BV3	Fr 50	Fr 50	Fr 50	Fr 50	Fr 50
BV4	Fr 100	Fr 100	Fr 100	Fr 100	Fr 100
BV5	€ 5		€ 5	€ 5	€ 5
BV6	€ 10		€ 10	€ 10	€ 10
BV7	€ 20		€ 20	€ 20	€ 20
BV8	€ 50		€ 50	€ 50	€ 50
BV9	£ 5		£ 5	£ 5	£ 5
BV10	£ 10		£ 10	£ 10	£ 10

XBA-CH&10 (Pulse/MDB/ICT104U/GPT/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ ENABLE INHIBIT-Sleep Only		ON						
★ 5 second Timeout Only		OFF						
★ NORMAL			OFF	OFF				
★ MODE1			OFF	ON				
★ MODE2			ON	OFF				
★ MODE1+2			ON	ON				
★ Pulse Mode	MDB Mode		ICT104V Mode					
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer		ON			
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT VCCS converter board		OFF			
★ Pulse Mode						ON		
★ Other Mode						OFF		
★ Pulse Mode	Other Mode							
★ 1 pulse / € 5	MDB Mode						OFF	OFF
★ 5 pulse / € 5	GPT Mode						OFF	ON
★ 10 pulse / € 5	ICT104U Mode						ON	OFF
★ 25 pulse / € 5	ICT104V Mode						ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

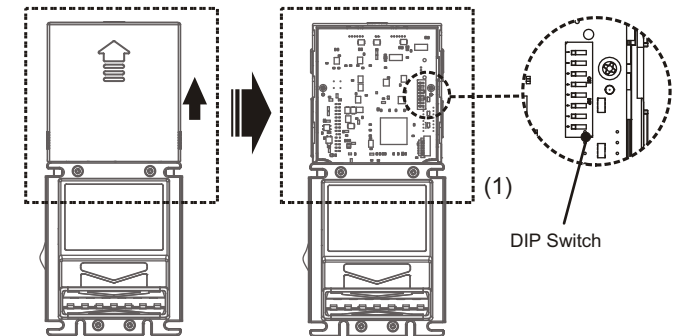

★ Manufacture setting

Note : 1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
 2. NORMAL: No sleep function
 3. MODE 1: Bill-acceptor wakes up VMC with banknote only (special cable required)
 4. MODE 2: VMC wakes up bill-acceptor
 5. MODE 1+2: Bill-acceptor wakes up with banknote or by VMC
 6. Calibration card is not needed.