


XBA-CZK4 Option Switch Settings

Supported bill CZK 100, 200, 500, 1000 4bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject CZK 100	ON							
★ Accept CZK 100	OFF							
★ Reject CZK 200		ON						
★ Accept CZK 200		OFF						
★ Reject CZK 500			ON					
★ Accept CZK 500			OFF					
★ Reject CZK 1000				ON				
★ Accept CZK 1000				OFF				
★ Reserved					ON			
★ Reserved					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

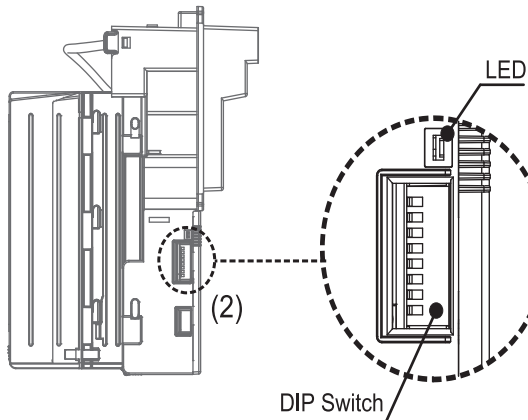

Currency Assign Data

Interface bill value	ICT104U	JPSTD	ccTalk	Pulse	RS232 A0
BV1	CZK 100	CZK 100	CZK 100	CZK 100	CZK 100
BV2	CZK 200		CZK 200	CZK 200	CZK 200
BV3	CZK 500		CZK 500	CZK 500	CZK 500
BV4	CZK 1000		CZK 1000	CZK 1000	CZK 1000

RS232 A0 INFORMATION

BillType Data	
Code	Denomination
1	Reserved
2	CZK 100
3	CZK 200
4	CZK 500
5	CZK 1000

XBA-CZK4 (Pulse/JPSTD/ccTalk/ICT/RS232 A0)

FUNCTION		SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Pulse Mode	Other Mode								
★ Inhibit Active HIGH	★ Table.1	ON							
Inhibit Active LOW	Table.1	OFF							
Reserved	Reserved		ON						
★ Reserved	Reserved		OFF						
★ 50ms LO / 50ms HI				OFF	OFF				
50ms LO / 100ms HI				OFF	ON				
50ms LO / 300ms HI				ON	OFF				
100ms LO / 150ms HI				ON	ON				
★ Credit-Pulse Normal HIGH	ccTalk 16-bit Encryption mode & Restoe Mode.(See Table.1)					ON			
Credit-Pulse Normal LOW	ccTalk 16-bit Decrypt mode & 8-bit checksum.(See Table.1)					OFF			
★ Pulse Mode	Pulse Mode						ON		
Other Mode	Other Mode						OFF		
★ 1 pulse / CZK 100	ccTalk Mode							OFF	OFF
2 pulses / CZK 100	RS232 A0 Mode							OFF	ON
5 pulses / CZK 100	ICT104U Mode							ON	OFF
20 pulses / CZK 100	JPSTD Mode							ON	ON

★ Manufacture setting

This dip switch is located on the CPU board, remove the CPU board cover first.

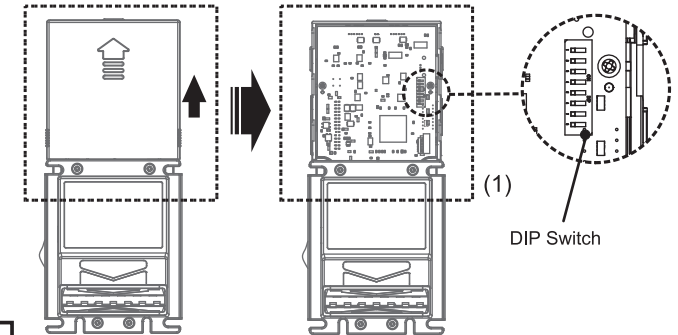


Table 1

	SW1	SW5
8-Bit Checksum	OFF	OFF
Restore mode(Note.1)	OFF	ON
CRC 16-Bit Decrypt Checksum	ON	OFF
CRC 16-Bit Encryption Checksum	ON	ON

Note : 1. Turn this dip to with restart the bill acceptor will restore ccTalk address to its default value of 40 and the encryption key to its default value of 123456.
2. Calibration card is needed