


XBA-EUR6

XBA Option Switch Settings(Pulse/MDB/ICT104U/ICT104V)

Supported bill € 5, 10, 20, 50, 100, 200 6bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reject € 5	ON							
★	Accept € 5	OFF							
★	Reject € 10		ON						
★	Accept € 10		OFF						
★	Reject € 20			ON					
★	Accept € 20			OFF					
★	Reject € 50				ON				
★	Accept € 50				OFF				
★	Reject € 100(2019) & 200(2019)				ON				
★	Accept € 100(2019) & 200(2019)				OFF				
★	Disable Bill Reject 4 Times BA Stop By 30 Sec					ON			
★	Enable Bill Reject 4 Times BA Stop By 30 Sec					OFF			
★	Stack Banknote when Power-up						ON		
★	Reject Banknote when Power-up						OFF		
★	Reserved								ON
★	Reserved								OFF

This dip switch is located at the side of XBA.

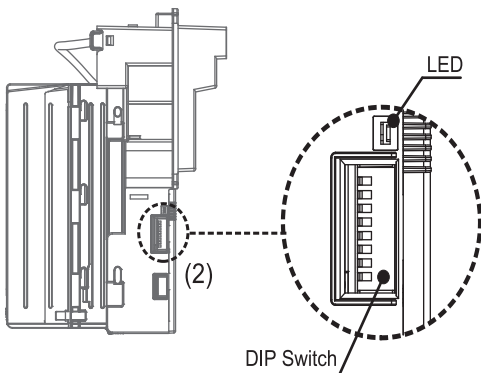


Currency Assign Data

Interface Bill value	ICT104U	ICT104V	Pulse	MDB
BV1	€ 5	€ 5	€ 5	€ 5
BV2	€ 10	€ 10	€ 10	€ 10
BV3	€ 20	€ 20	€ 20	€ 20
BV4	€ 50	€ 50	€ 50	€ 50
BV5	€ 100	€ 100	€ 100	€ 100
BV6	€ 200	€ 200	€ 200	€ 200

XBA-EUR6 (Pulse/MDB/ICT104U/ICT104V)

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8		
★	Inhibit Active HIGH	ON									
	Inhibit Active LOW	OFF									
★	Reserved									ON	
	Reserved									OFF	
★	Reserved			ON							
	Reserved			OFF							
★	Reserved									ON	
	Reserved									OFF	
★	Pulse Mode	MDB Mode			ICT104V Mode						
	Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2			Connect with coin changer		ON				
	Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0			Connect with ICT JPSTD converter board		OFF				
	Pulse Mode							ON			
	Other Mode							OFF			
	★	Pulse Mode	Other Mode								
		1 pulse / € 5	MDB Mode							OFF	OFF
		5 pulse / € 5	Reserved							OFF	ON
		10 pulse / € 5	ICT104U Mode							ON	OFF
		25 pulse / € 5	ICT104V Mode							ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

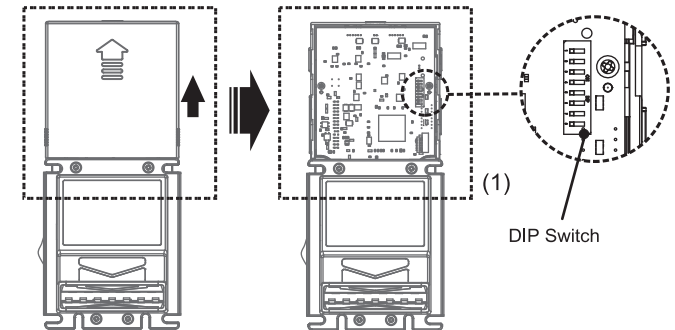

★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note : 1.Please reset the bill acceptor after set the dip switch.

2.Calibration card is needed.