


XBA-GMD5 Option Switch Settings

Supported bill GMD 10, 20, 50, 100, 200 5bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject GMD 10	ON							
★ Accept GMD 10	OFF							
★ Reject GMD 20		ON						
★ Accept GMD 20		OFF						
★ Reject GMD 50			ON					
★ Accept GMD 50			OFF					
★ Reject GMD 100				ON				
★ Accept GMD 100				OFF				
★ Reject GMD 200					ON			
★ Accept GMD 200					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

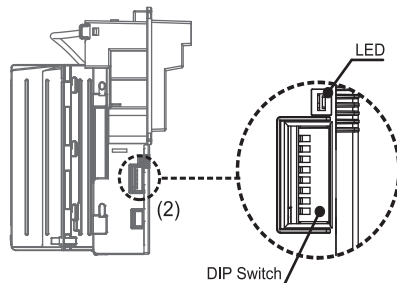


Currency Assign Data

Interface Bill value	ICT104U	ICT104V	Pulse	MDB
BV1	GMD 10	GMD 10	GMD 10	GMD 10
BV2	GMD 20	GMD 20	GMD 20	GMD 20
BV3	GMD 50	GMD 50	GMD 50	GMD 50
BV4	GMD 100	GMD 100	GMD 100	GMD 100
BV5	GMD 200	GMD 200	GMD 200	GMD 200

XBA-GMD5 (Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ Reserved		ON						
★ Reserved		OFF						
★ Reserved			ON					
★ Reserved			OFF					
★ Reserved				ON				
★ Reserved				OFF				
Pulse Mode		MDB Mode		ICT104V Mode				
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer		ON			
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT JPSTD converter board		OFF			
★ Pulse Mode					ON			
★ Other Mode					OFF			
Pulse Mode		Other Mode						
★ 1 pulse / GMD 10	MDB Mode					OFF	OFF	
★ 2 pulses / GMD 10	Reserved					OFF	ON	
★ 5 pulses / GMD 10	ICT104U Mode					ON	OFF	
★ 10 pulses / GMD 10	ICT104V Mode					ON	ON	

This dip switch is located on the CPU board, remove the CPU board cover first.

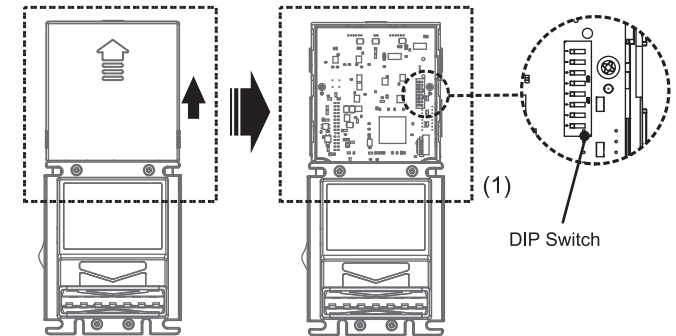

★ Manufacture setting

- Note :
1. Please reset the bill acceptor after set the dip switch.
 2. Dip switches 1 to 5 are only used for pulse protocol.
 3. Calibration card is needed.