


# XBA-KZT6 Option Switch Settings

Supported bill KZT 200, 500, 1000, 2000, 5000, 10000 6bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject KZT 200 <small>(Note.3)</small>	ON							
★ Accept KZT 200 <small>(Note.3)</small>	OFF							
★ Reject KZT 500 & 1000		ON						
★ Accept KZT 500 & 1000		OFF						
★ Reject KZT 2000			ON					
★ Accept KZT 2000			OFF					
★ Reject KZT 5000				ON				
★ Accept KZT 5000				OFF				
★ Reject KZT 10000					ON			
★ Accept KZT 10000					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

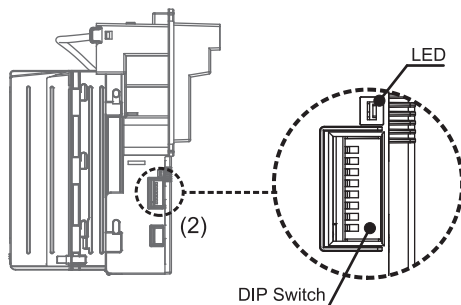

Note : 1.When Dip 1 is OFF ICT106U ==>  
 KZT 200=0x40,KZT 500=0x41,KZT 1000=0x42,KZT 2000=0x43,KZT 5000=0x44,KZT 10000=0x45  
 Pulse ==>KZT 200=2 Pulses ,KZT 500=5 Pulses ,KZT 1000=10 Pulses,  
 KZT 2000=20 Pulses ,KZT 5000=50 Pulses,KZT 10000=100 Pulses  
 When Dip 1 is ON ICT106U ==>KZT 500=0x40,KZT 1000=0x41,  
 KZT 2000=0x42,KZT 5000=0x43,KZT 10000=0x44  
 Pulse ==>KZT 500=1 Pulse,KZT 1000=2 Pulses ,KZT 2000=4 Pulses ,KZT 5000=10 Pulses,  
 KZT 10000=20 Pulses

## Currency Assign Data


Interface	ICT106U		ccNet	ICT104V	Pulse		MDB
	When Dip 1 is OFF	When Dip 1 is ON			When Dip 1 is OFF	When Dip 1 is ON	
BV1	200	500	200	200	200	200	200
BV2	500	1000	500	500	500	500	500
BV3	1000	2000	1000	1000	1000	1000	1000
BV4	2000	5000	2000	2000	2000	2000	2000
BV5	5000	10000	5000	5000	5000	5000	5000
BV6	10000		10000	10000	10000	10000	10000

## Appendix

# XBA-KZT6 (Pulse/MDB/ICT106U/ccNet/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ Reserved		ON						
★ Reserved		OFF						
★ Reserved			ON					
★ Reserved			OFF					
★ Reserved				ON				
★ Reserved				OFF				
	<b>Pulse Mode</b>	<b>MDB Mode</b>	<b>ccNet Mode</b>	<b>ICT104V Mode</b>				
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 0.01 Decimal Point Position (DPP) = 0	9600 Baud Rate	Connect with coin changer	ON				
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0	19200 Baud Rate	Connect with ICT JPSTD converter board	OFF				
★ Pulse Mode							ON	
★ Other Mode							OFF	
	<b>Pulse Mode</b>	<b>Other Mode</b>						
★ 1 pulse / KZT 100 & 500 (Note.3)		MDB Mode					OFF	OFF
★ 2 pulses / KZT 100 & 500 (Note.3)		ICT106U Mode					OFF	ON
★ 5 pulses / KZT 100 & 500 (Note.3)		ccNet Mode					ON	OFF
★ 20 pulses / KZT 100 & 500 (Note.3)		ICT104V Mode					ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

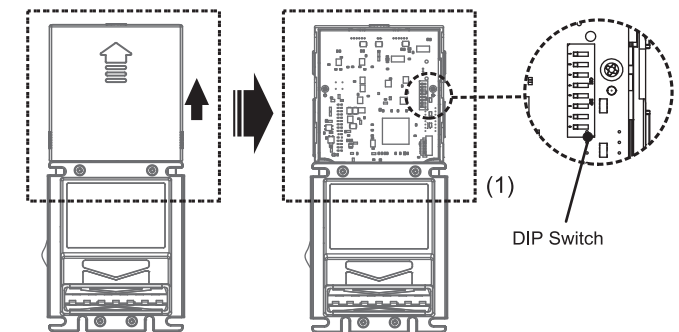

### ★ Manufacture setting

After setting dip switch of the credit pulses,you should reset the bill acceptor again.

Note : 1.No sleep function.

2.Calibration card is needed.

3.When Dip 1 is OFF ICT106U ==>KZT 200=0x40,KZT 500=0x41,KZT 1000=0x42,  
 KZT 2000=0x43,KZT 5000=0x44,KZT 10000=0x45  
 Pulse ==>KZT 200=2 Pulses ,KZT 500=5 Pulses ,KZT 1000=10 Pulses,  
 KZT 2000=20 Pulses ,KZT 5000=50 Pulses,KZT 10000=100 Pulses

When Dip 1 is ON ICT106U ==>KZT 500=0x40,KZT 1000=0x41,  
 KZT 2000=0x42,KZT 5000=0x43,KZT 10000=0x44

Pulse ==>KZT 500=1 Pulse ,KZT 1000=2 Pulses ,KZT 2000=4 Pulses,  
 KZT 5000=10 Pulses,KZT 10000=20 Pulses