


# XBA-KZT6

## XBA Option Switch Settings(Pulse/MDB/ICT104U/ICT104V)

Supported bill KZT 200, 500, 1000, 2000, 5000, 10000 6bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject KZT 200	ON							
★ Accept KZT 200	OFF							
★ Reject KZT 500 & 1000		ON						
★ Accept KZT 500 & 1000		OFF						
★ Reject KZT 2000			ON					
★ Accept KZT 2000			OFF					
★ Reject KZT 5000				ON				
★ Accept KZT 5000				OFF				
★ Reject KZT 10000					ON			
★ Accept KZT 10000					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

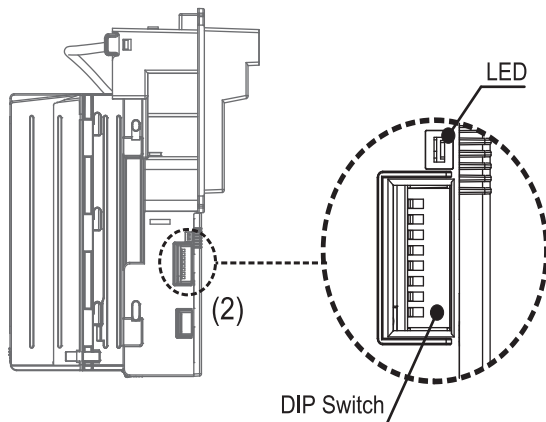


### Currency Assign Data

Interface	ICT104U	ICT104V	Pulse	MDB
BV1	KZT 200	KZT 200	KZT 200	KZT 200
BV2	KZT 500	KZT 500	KZT 500	KZT 500
BV3	KZT 1000	KZT 1000	KZT 1000	KZT 1000
BV4	KZT 2000	KZT 2000	KZT 2000	KZT 2000
BV5	KZT 5000	KZT 5000	KZT 5000	KZT 5000
BV6	KZT 10000	KZT 10000	KZT 10000	KZT 10000

# XBA-KZT6 (Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ Reserved		ON						
★ Reserved		OFF						
★ Reserved			ON					
★ Reserved			OFF					
★ Reserved				ON				
★ Reserved				OFF				
<b>Pulse Mode</b>		<b>MDB Mode</b>		<b>ICT104V Mode</b>				
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 0.01 Decimal Point Position (DPP) = 0		Connect with coin changer		ON			
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT VCCS converter board		OFF			
★ Pulse Mode					ON			
★ Other Mode					OFF			
<b>Pulse Mode</b>		<b>Other Mode</b>						
★ 1 pulse / KZT 100	MDB Mode						OFF	OFF
★ 2 pulses / KZT 100	Reserved						OFF	ON
★ 5 pulses / KZT 100	ICT104U Mode						ON	OFF
★ 20 pulses / KZT 100	ICT104V Mode						ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

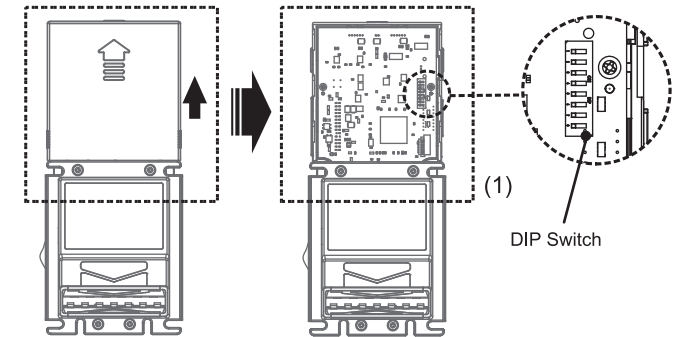

### ★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note : 1. Please reset the bill acceptor after set the dip switch.

2. Dip switches 1 to 5 are only used for pulse protocol.

3. Calibration card is needed.