


# XBA-PLN6 Option Switch Settings

Supported bill PLN 10, 20, 50, 100, 200, 500 6bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject PLN 10 & 20	ON							
★ Accept PLN 10 & 20	OFF							
★ Reject PLN 50		ON						
★ Accept PLN 50		OFF						
★ Reject PLN 100			ON					
★ Accept PLN 100			OFF					
★ Reject PLN 200				ON				
★ Accept PLN 200				OFF				
★ Reject PLN 500					ON			
★ Accept PLN 500					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

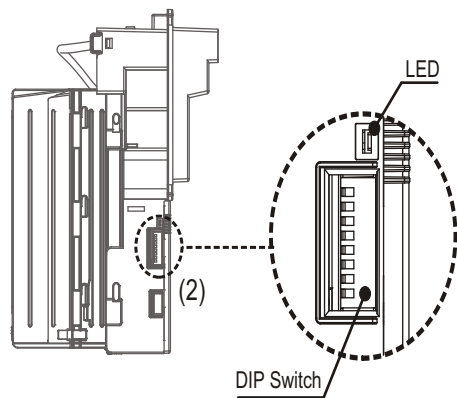


## Currency Assign Data

Interface Bill value	ICT104U	GPT	ICT104V	Pulse	MDB
BV1	PLN 10	PLN 10	PLN 10	PLN 10	PLN 10
BV2	PLN 20	PLN 20	PLN 20	PLN 20	PLN 20
BV3	PLN 50	PLN 50	PLN 50	PLN 50	PLN 50
BV4	PLN 100	PLN 100	PLN 100	PLN 100	PLN 100
BV5	PLN 200		PLN 200	PLN 200	PLN 200
BV6	PLN 500		PLN 500	PLN 500	PLN 500

# XBA-PLN6 (Pulse/MDB/ICT104U/GPT/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ Reserved		ON						
★ Reserved		OFF						
★ Reserved			ON					
★ Reserved			OFF					
★ Reserved				ON				
★ Reserved				OFF				
<b>Pulse Mode</b>		<b>MDB Mode</b>		<b>ICT104V Mode</b>				
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer				ON	
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT VCCS converter board				OFF	
★ Pulse Mode							ON	
★ Other Mode							OFF	
<b>Pulse Mode</b>		<b>Other Mode</b>						
★ 1 pulse / PLN 10	MDB Mode						OFF	OFF
★ 5 pulse / PLN 10	GPT Mode						OFF	ON
★ 10 pulse / PLN 10	ICT104U Mode						ON	OFF
★ 25 pulse / PLN 10	ICT104V Mode						ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

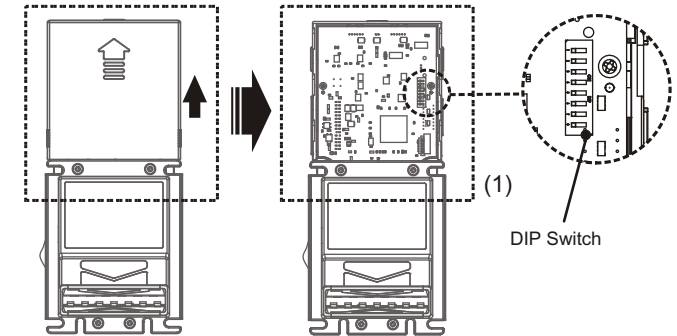

★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note : 1.Please reset the bill acceptor after set the dip switch.

2.Dip switches 1 to 5 are only used for pulse protocol.

3.calibrate card.