


XBA-SBD6 Option Switch Settings

Supported bill SBD 5, 10, 20, 40, 50, 100 6bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject SBD 5 & 10	ON							
★ Accept SBD 5 & 10	OFF							
★ Reject SBD 20		ON						
★ Accept SBD 20		OFF						
★ Reject SBD 40			ON					
★ Accept SBD 40			OFF					
★ Reject SBD 50				ON				
★ Accept SBD 50				OFF				
★ Reject SBD 100					ON			
★ Accept SBD 100					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

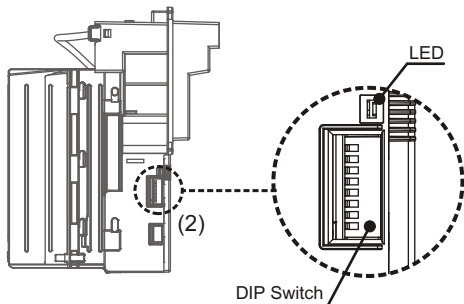

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note: (1) Please reset the bill acceptor after set the dip switch.
 (2) Dip switches 1 to 5 are only used for pulse protocol.
 (3) Calibration card is needed.

Currency Assign Data

Interface Bill value	ICT106U	ccNet	ICT104V	Pulse	MDB
BV1	SBD 5	SBD 5	SBD 5	SBD 5	SBD 5
BV2	SBD 10	SBD 10	SBD 10	SBD 10	SBD 10
BV3	SBD 20	SBD 20	SBD 20	SBD 20	SBD 20
BV4	SBD 40	SBD 40	SBD 40	SBD 40	SBD 40
BV5	SBD 50	SBD 50	SBD 50	SBD 50	SBD 50
BV6	SBD 100	SBD 100	SBD 100	SBD 100	SBD 100

XBA-SBD6 (Pulse/MDB/ICT106U/ccNet/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ Reserved		ON						
★ Reserved		OFF						
★ Reserved			ON					
★ Reserved			OFF					
★ Reserved				ON				
★ Reserved				OFF				
Pulse Mode	MDB Mode		ccNet Mode		ICT104V Mode			
★ Credit-Pulse Normal HIGH	SCALING_FACTOR(SF)= 100 DECIMAL_Point Position(DPP)= 2		9600 Baud Rate		Connect with coin changer			ON
Credit-Pulse Normal LOW	SCALING_FACTOR(SF)= 1 DECIMAL_Point Position(DPP)= 0		19200 Baud Rate		Connect with ICT VCCS converter board			OFF
★ Pulse Mode						ON		
Other Mode						OFF		
Pulse Mode	Other Mode							
★ 1 pulse / SBD 5	MDB Mode					OFF	OFF	
2 pulses / SBD 5	ICT106U Mode					OFF	ON	
5 pulses / SBD 5	ccNet Mode					ON	OFF	
10 pulses / SBD 5	ICT104V Mode					ON	ON	

★ Manufacture setting

This dip switch is located on the CPU board, remove the CPU board cover first.

