


# XBA-SEK4 Option Switch Settings

Supported bill SKr 20, 50, 100, 200 4bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject SKr 20	ON							
★ Accept Skr 20	OFF							
★ Reject Skr 50		ON						
★ Accept Skr 50		OFF						
★ Reject Skr 100			ON					
★ Accept Skr 100			OFF					
★ Reject Skr 200				ON				
★ Accept Skr 200				OFF				
★ Reserved					ON			
★ Reserved					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

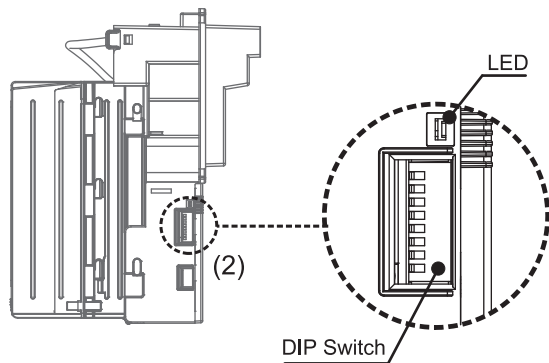


## Currency Assign Data

Interface	Pulse	MDB	ICT104V	ICT104U
BV1	SKr 20	SKr 20	SKr 20	SKr 20
BV2	SKr 50	SKr 50	SKr 50	SKr 50
BV3	SKr 100	SKr 100	SKr 100	SKr 100
BV4	SKr 200	SKr 200	SKr 200	SKr 200

# XBA-SEK4 (Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
Reserved		ON						
★ Reserved		OFF						
Reserved			ON					
★ Reserved			OFF					
Reserved				ON				
★ Reserved				OFF				
<b>Pulse Mode</b>	<b>MDB Mode</b>		<b>ICT104V Mode</b>					
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer		ON			
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT JPSTD converter board		OFF			
★ Pulse Mode					ON			
Other Mode					OFF			
<b>Pulse Mode</b>	<b>Other Mode</b>							
★ 1 pulse / SKr 10	MDB Mode					OFF	OFF	
5 pulses / SKr 10	Reserved					OFF	ON	
10 pulses / SKr 10	ICT104U Mode					ON	OFF	
25 pulses / SKr 10	ICT104V Mode					ON	ON	

This dip switch is located on the CPU board, remove the CPU board cover first.

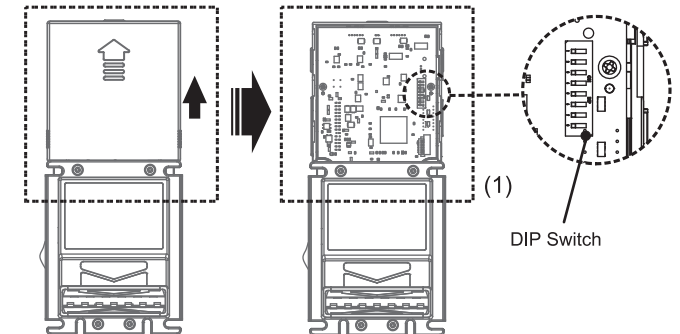

### ★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note : (1) Please reset the bill acceptor after set the dip switch.

(2) Dip switches 1 to 5 are only used for pulse protocol.

(3) Calibration card is needed.