


XBA-TRY6 Option Switch Settings

Supported bill Lira 5, 10, 20, 50, 100, 200 6bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Reject Lira 5	ON							
★ Accept Lira 5	OFF							
Reject Lira 10		ON						
★ Accept Lira 10		OFF						
Reject Lira 20			ON					
★ Accept Lira 20			OFF					
Reject Lira 50				ON				
★ Accept Lira 50				OFF				
Reject Lira 100 & 200					ON			
★ Accept Lira 100 & 200					OFF			
Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

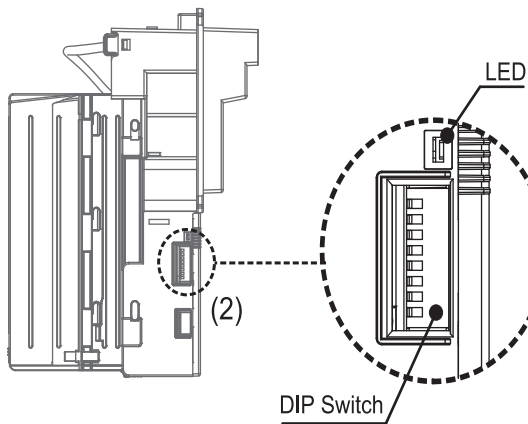

Currency Assign Data

Interface Bill Value	Pulse	JPSTD	ccTalk	ICT104U	RS232 A0
BV1	Lira 5	Lira 5	Lira 5	Lira 5	Lira 5
BV2	Lira 10		Lira 10	Lira 10	Lira 10
BV3	Lira 20		Lira 20	Lira 20	Lira 20
BV4	Lira 50		Lira 50	Lira 50	Lira 50
BV5	Lira 100		Lira 100	Lira 100	Lira 100
BV6	Lira 200		Lira 200	Lira 200	Lira 200

RS232 A0 INFORMATION


BillType Data	
Code	Denomination
1	Reserved
2	Reserved
3	Lira 5
4	Lira 10
5	Lira 20
6	Lira 50
7	Lira 100
8	Lira 200

Appendix

XBA-TRY6 (Pulse/JPSTD/ccTalk/ICT/RS232 A0)

FUNCTION		SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Pulse Mode	Other Mode								
Inhibit Active HIGH		ON							
★ Inhibit Active LOW		OFF							
Reserved			ON						
★ Reserved			OFF						
Reserved				ON					
★ Reserved				OFF					
Reserved					ON				
★ Reserved					OFF				
★ Credit-Pulse Normal HIGH	ccTalk 16-bit Encryption mode & Restoe Mode (See Table.1)					ON			
Credit-Pulse Normal LOW	ccTalk 16-bit Decrypt mode & 8-bit checksum (See Table.1)					OFF			
★ Pulse Mode							ON		
Other Mode							OFF		
★ 1 pulse / Lira 5	ccTalk Mode							OFF	OFF
5 pulses / Lira 5	RS232 A0 Mode							OFF	ON
10 pulses / Lira 5	ICT104U Mode							ON	OFF
25 pulses / Lira 5	JPSTD Mode							ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

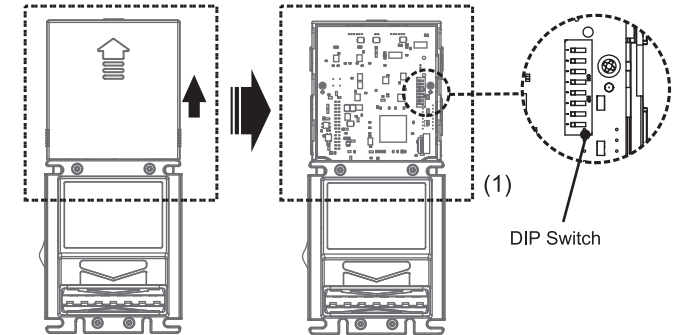

★ Manufacture setting

- Note :
1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
 2. CCtalk address to its default value of 40 and the encryption key to its default value of 123456.
 3. Calibration card is needed.