


NDE/NDR Series

Note Dispenser

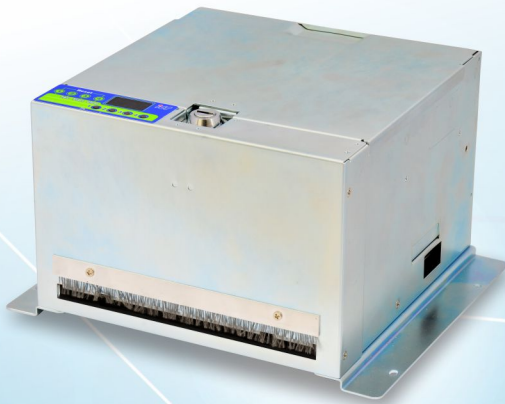

- A wide-range voltage power-input.
- Identify and dispense worldwide currencies through a built-in study mode.
- Easy and convenient firmware download via USB pen drive.
- Easy operation and settings via digital display with key pad.
- Security lockable cashbox.
- Compact design to save installation space.

NDE1000

- Support worldwide currencies through study mode to make sure dispense bills exactly.
- USB pen drive update firmware.
- Large capacity with steady operation.



NDR Series

ict

NDE/NDR Series

NDE1000

NDE1000, a compact size with up to 1000 banknotes capacity, is designed able to dispense versatile notes released from worldwide countries via a built-in study mode. With LCM display and operation key-pad, NDE1000 is very easy to use for the user no matter on settings, operations or troubleshooting.

Specifications



Dispensing Speed

Approx. 2.5 notes/sec.



Bill Accepted

W: 62~77 mm/2.44~3.03 inches
L: 120~160mm/4.72~6.30 inches
T: 0.08~0.125mm/0.003~0.004 inches



Capacity

Suggested capacity around 500 notes.



Interface

Pulse
RS232
Hopper
ICT Protocol



Dimension

(H)130 x (W)195 x (D)200 mm/
(H)4.72 x (W)7.67 x (D)7.87 inches



Power Source

12~24V DC



Power Consumption

DC 12V- Standby : Approx.0.1A
Operation: Approx.1.8A
Maximum: Approx.≤4.5A
DC 24V- Standby : Approx.0.1A
Operation: Approx.1A
Maximum: Approx.≤3.5A



Weight

Approx. 5 KG/11.0 lbs



Environmental

Operating Temperature:
0°C/32°F~55°C/131°F
Storage Temperature:
-30°C/-22°F~70°C/158°F
Humidity: 30%~85%RH (no condensation)



Recommended Applications

Indoor/Outdoor Vending, Kiosk

NDR Series

Specifications



Dispensing Speed

Approx. 2.5 notes/sec.



Bill Accepted

W: 62~77 mm/2.44~3.03 inches
L: 120~160mm/4.72~6.30 inches
T: 0.08~0.125mm/0.003~0.004 inches



Capacity

Cassette Capacity :
Approx. 800~1000 banknotes
(can be different depending on note thickness)

Reject Capacity:
Approx. 30 notes
(can be different depending on note thickness)



Interface

Pulse(NDR1000 only)
RS232



Dimension

NDR1000
(H)226.5 x (W)263.3 x (D)310 mm
(H)8.92 x (W)10.36 x (D)12.20 inches

NDR2000
(H)357.5 x (W)263.3 x (D)310 mm
(H)14.07 x (W)10.36 x (D)12.20 inches



Power Source

24 V DC



Power Consumption

NDR1000 Standby : 0.1A
Operation: 0.85A
Maximum: 1.6A(Normal),
3A (Move to reject vault)
NDR2000 Standby : 0.2A
Operation: 2A
Maximum: 4.5A(Normal),
6A (Move to reject vault)



Weight

NDR1000 Approx. 10KG/22.0 lbs
NDR2000 Approx. 16.5KG/36.4 lbs



Environmental

Operating Temperature:
0°C/32°F~55°C/131°F
Storage Temperature:
-30°C/-22°F~70°C/158°F
Humidity: 30%~85%RH (no condensation)



Recommended Applications

Indoor/Outdoor Vending, Kiosk



International Currency Technologies Corp.

No.28, Ln. 15, Sec. 6, Minquan E. Rd.,
Neihu Dist., Taipei City 114, Taiwan
Phone: +886-2-2793-1236
Fax: +886-2-2793-6125

E-Mail:

sales@ictgroup.com.tw (Product Information)
fae@ictgroup.com.tw (Technical Service)

Website:

www.ictgroup.com.tw