


XBA-BYR8 Option Switch Settings

Supported bill BYR 500, 1000, 5000, 10000, 20000, 50000, 100000, 5, 10, 20 10 bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
	Reject Ruble 500	ON							
★	Accept Ruble 500	OFF							
	Reject Ruble 1000 & 5000		ON						
★	Accept Ruble 1000 & 5000		OFF						
	Reject Ruble 10000 & 20000			ON					
★	Accept Ruble 10000 & 20000			OFF					
	Reject Ruble 50000 & 100000 & 5 & 10				ON				
★	Accept Ruble 50000 & 100000 & 5 & 10				OFF				
	Reject Ruble 20				ON				
★	Accept Ruble 20				OFF				
	Disable Bill Reject 4 Times BA Stop By 30 Sec					ON			
★	Enable Bill Reject 4 Times BA Stop By 30 Sec					OFF			
	Stack Banknote when Power-up							ON	
★	Reject Banknote when Power-up							OFF	
	ENABLE IrDA Download								ON
★	Reserved								OFF

This dip switch is located at the side of XBA.

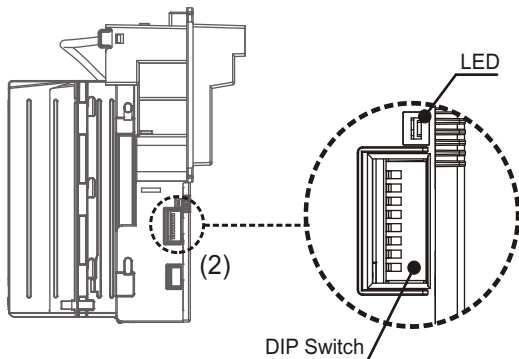

Currency Assign Data


Interface	Bill value	ICT104U	GPT	ICT104V	Pulse		MDB	
					When Dip 1 is ON	When Dip 1 is OFF	When Dip 1 is ON	When Dip 1 is OFF
	BV1	500	500	500		500		500
	BV2	1,000	1,000	1,000	1,000	1,000	1,000	1,000
	BV3	5,000	5,000	5,000	5,000	5,000	5,000	5,000
	BV4	10,000	10,000	10,000	10,000	10,000	10,000	10,000
	BV5	20,000		20,000	20,000	20,000	20,000	20,000
	BV6	50,000		50,000	50,000	50,000	50,000	50,000
	BV7	100,000		100,000	100,000	100,000	100,000	100,000
	BV8	5		5	5	5	5	5
	BV9	10		10	10	10	10	10
	BV10	20		20	20	20	20	

Appendix

XBA-BYR10 (Pulse/MDB/ICT104U/GPT/ICT104V)

FUNCTION		SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
★	Inhibit Active HIGH	ON								
	Inhibit Active LOW	OFF								
ENABLE INHIBIT-Sleep Only		ON								
5 second Timeout Only		OFF								
★	Reserved			ON						
★	Reserved			OFF						
★	Reserved									ON
	Reserved									OFF
Pulse Mode		MDB Mode			ICT104V Mode					
★	Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2			Connect with coin changer		ON			
	Credit-Pulse Normal LOW	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2			Connect with ICT VCCS converter board		OFF			
★	Pulse Mode						ON			
	Other Mode						OFF			
Pulse Mode				Other Mode						
Dip 1 OFF		Dip 1 ON								
★	1 pulse / Ruble 500	1 pulse / Ruble 1000		MDB Mode				OFF	OFF	
	5 pulse / Ruble 500	5 pulse / Ruble 1000		GPT Mode				OFF	ON	
	10 pulse / Ruble 500	10 pulse / Ruble 1000		ICT104U Mode				ON	OFF	
	25 pulse / Ruble 500	25 pulse / Ruble 1000		ICT104V Mode				ON	ON	

This dip switch is located on the CPU board, remove the CPU board cover first.

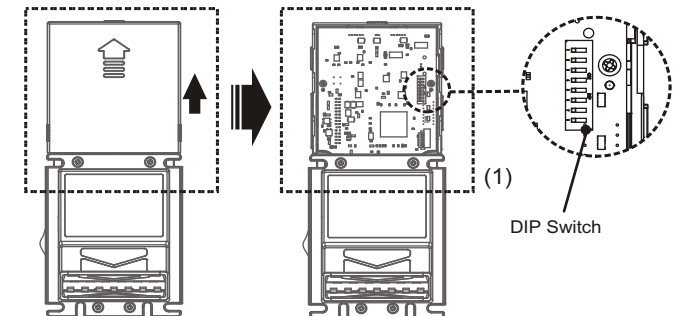

★ Manufacture setting

Note : 1.Please reset the bill acceptor after set the dip switch.

2.Dip switches 1 to 5 are only used for pulse protocol.

3.Dip 1 turn OFF (MDB Mode : Reject BYR 200000).

4.Not calibrate card.

5.SW2 dip2 and dip3 only work when dip5 turn OFF on NORMAL MODE.