


XBA-CEK8(CZK4+EUR4) Option Switch Settings

Supported bill CZK 100, 200, 500, 1000 4bills.
€ 5, 10, 20, 50 4bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reject CZK 100 & 200	ON							
★	Accept CZK 100 & 200	OFF							
★	Reject CZK 500 & 1000		ON						
★	Accept CZK 500 & 1000		OFF						
★	Reject € 5 & 10			ON					
★	Accept € 5 & 10			OFF					
★	Reject € 20 & 50				ON				
★	Accept € 20 & 50				OFF				
★	Reject € 5(2002) & 10(2002)					ON			
★	Accept Normal					OFF			
★	Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★	Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★	Stack Banknote when Power-up							ON	
★	Reject Banknote when Power-up							OFF	
★	Reserved								ON
★	Reserved								OFF

This dip switch is located at the side of XBA.

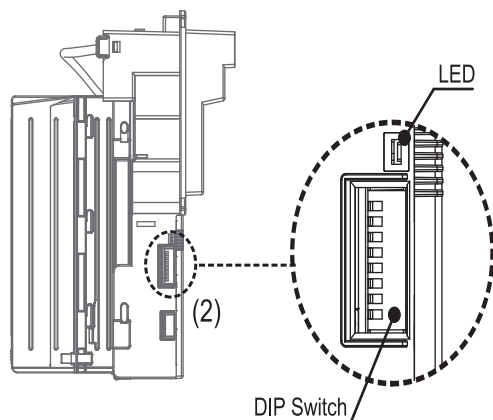

Currency Assign Data

Interface	ICT104U	JPSTD	ccTalk	Pulse	RS232 A0
Bill value					
BV1	CZK 100	CZK 100	CZK 100	CZK 100	CZK 100
BV2	CZK 200		CZK 200	CZK 200	CZK 200
BV3	CZK 500		CZK 500	CZK 500	CZK 500
BV4	CZK 1000		CZK 1000	CZK 1000	CZK 1000
BV5	EUR 5		EUR 5	EUR 5	EUR 5
BV6	EUR 10		EUR 10	EUR 10	EUR 10
BV7	EUR 20		EUR 20	EUR 20	EUR 20
BV8	EUR 50		EUR 50	EUR 50	EUR 50

RS232 A0 INFORMATION


BillType Data	
Code	Denomination
1	Reserved
2	CZK 100
3	CZK 200
4	CZK 500
5	CZK 1000
6	EUR 5
7	EUR 10
8	EUR 20
9	EUR 50

Appendix

XBA-CEK8(CZK4+EUR4) (Pulse/JPSTD/ccTalk/ICT/RS232 A0)

FUNCTION		SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
★	Pulse Mode	Other Mode		ON						
	Inhibit Active HIGH									ON
	Inhibit Active LOW									OFF
		Reserved		ON						
★	Reserved		OFF							
★	50ms LO / 50ms HI			OFF	OFF					
	50ms LO / 100ms HI			OFF	ON					
	65ms LO / 75ms HI			ON	OFF					
	100ms LO / 150ms HI			ON	ON					
★	Credit-Pulse Normal HIGH	ccTalk 16-bit Encryption mode & Restoe Mode.(See Table.1)				ON				
	Credit-Pulse Normal LOW	ccTalk 16-bit Decrypt mode & 8-bit checksum(See Table.1)				OFF				
★	Pulse Mode						ON			
	Other Mode						OFF			
★	1 pulse / € 5	ccTalk Mode						OFF	OFF	
	5 pulses / € 5	RS232 A0 Mode						OFF	ON	
	10 pulses / € 5	ICT104U Mode						ON	OFF	
	25 pulses / € 5	JPSTD Mode						ON	ON	

This dip switch is located on the CPU board, remove the CPU board cover first.

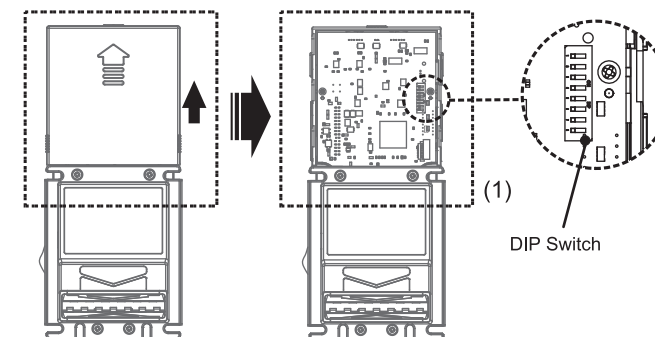

★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.
Note : 1. Calibration card is needed.

2.Turn this dip to with restart the bill acceptor will restore CCTalk address to its default value of 40 and the encryption key to its default value of 123456.

Table 1

SW2 DIP 1	OFF	OFF	ON	★ ON
SW2 DIP 5	OFF	ON	OFF	★ ON
	8-Bit Checksum	Restore mode (Note.2)	CRC 16-Bit Decrypt Checksum	CRC 16-Bit Encryption Checksum