


XBA-TEY12(TRY6+EUR6) Option Switch Settings

Supported bill Lira 5, 10, 20, 50, 100, 200 6bills.
EUR 5, 10, 20, 50, 100, 200 6bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject Lira 5 & 10 & 20	ON							
★ Accept Lira 5 & 10 & 20	OFF							
★ Reject Lira 50 & 100 & 200		ON						
★ Accept Lira 50 & 100 & 200		OFF						
★ Reject € 5 & 10			ON					
★ Accept € 5 & 10			OFF					
★ Reject € 20 & 50				ON				
★ Accept € 20 & 50				OFF				
★ Reject € 100(2019) & 200(2019)					ON			
★ Accept € 100(2019) & 200(2019)					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec					ON			
★ Enable Bill Reject 4 Times BA Stop By 30 Sec					OFF			
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

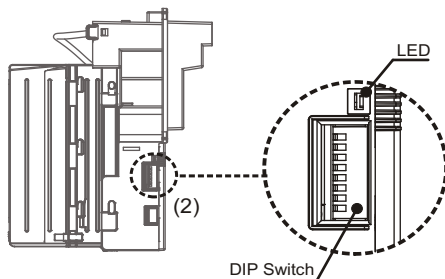

Currency Assign Data

Interface Bill value	ICT104U	GPT	ICT104V	Pulse	MDB
BV1	Lira 5	Lira 5	Lira 5	Lira 5	Lira 5
BV2	Lira 10	Lira 10	Lira 10	Lira 10	Lira 10
BV3	Lira 20	Lira 20	Lira 20	Lira 20	Lira 20
BV4	Lira 50	Lira 50	Lira 50	Lira 50	Lira 50
BV5	Lira 100		Lira 100	Lira 100	Lira 100
BV6	Lira 200		Lira 200	Lira 200	Lira 200
BV7	Euro 5		Euro 5	Euro 5	Euro 5
BV8	Euro 10		Euro 10	Euro 10	Euro 10
BV9	Euro 20		Euro 20	Euro 20	Euro 20
BV10	Euro 50		Euro 50	Euro 50	Euro 50
BV11	Euro 100		Euro 100	Euro 100	Euro 100
BV12	Euro 200		Euro 200	Euro 200	Euro 200

XBA-TEY12(TRY6+EUR6)(Pulse/MDB/ICT104U/GPT/ICT104V)

FUNCTION					SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8		
★	Inhibit Active HIGH				ON									
	Inhibit Active LOW				OFF									
★	Reserved					ON								
	Reserved					OFF								
★	Reserved						ON							
	Reserved						OFF							
★	Reserved							ON						
	Reserved							OFF						
Pulse Mode					MDB Mode			ICT104V Mode						
★	Credit-Pulse Normal HIGH				Scaling Factor (SF) = 10 Decimal Point Position (DPP) = 1			★ Connect with coin changer	ON					
	Credit-Pulse Normal LOW				★	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0			Connect with ICT VCCS converter board	OFF				
★	Pulse Mode										ON			
	Other Mode										OFF			
★	Pulse Mode		Other Mode											
	1 pulse / Lira 5		MDB Mode										OFF	OFF
	5 pulse / Lira 5		GPT Mode										OFF	ON
	10 pulse / Lira 5		ICT104U Mode										ON	OFF
	25 pulse / Lira 5		ICT104V Mode										ON	ON

★ Manufacture setting

Note :

1. Please reset the bill acceptor after set the dip switch.
2. Dip switches 1 to 5 are only used for pulse protocol.
3. Calibrate card.
4. The transaction Record can be saved by USB MSD (only for EX series)
5. EUR \$5 display TRY 30 (Only for Pulse, MDB)
EUR \$10 display TRY 60 (Only for Pulse, MDB)
EUR \$20 display TRY 120 (Only for Pulse, MDB)
EUR \$50 display TRY 300 (Only for Pulse, MDB)
EUR \$100 display TRY 600 (Only for Pulse, MDB)
EUR \$200 display TRY 1200 (Only for Pulse, MDB)

This dip switch is located on the CPU board, remove the CPU board cover first.

