


# XBA-THB4 Option Switch Settings

Supported bill THB 20, 50, 100, 500 4bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject THB 20	ON							
★ Accept THB 20	OFF							
★ Reject THB 50		ON						
★ Accept THB 50		OFF						
★ Reject THB 100			ON					
★ Accept THB 100			OFF					
★ Reject THB 500				ON				
★ Accept THB 500				OFF				
★ Reserved					ON			
★ Reserved					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ High Acceptance (Note.2)								ON
★ High Security								OFF

This dip switch is located at the side of XBA.

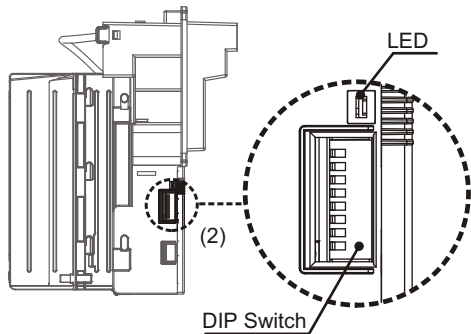

## Currency Assign Data

Interface Bill value	Pulse	MDB	ICT104U	ICT104V	ICT002U
BV1	THB 20	THB 20	THB 20	THB 20	THB 20
BV2	THB 50	THB 50	THB 50	THB 50	THB 50
BV3	THB 100	THB 100	THB 100	THB 100	THB 100
BV4	THB 500	THB 500	THB 500	THB 500	THB 500

# XBA-THB4 (Pulse/MDB/ICT002U/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
★ Inhibit Active HIGH	ON								
★ Inhibit Active LOW	OFF								
★ Reserved		ON							
★ Reserved		OFF							
★ Reserved			ON						
★ Reserved			OFF						
★ Reserved				ON					
★ Reserved				OFF					
	<b>Pulse Mode</b>		<b>MDB Mode</b>		<b>ICT104V Mode</b>				
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer		ON				
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT VCCS converter board		OFF				
★ Pulse Mode						ON			
★ Other Mode						OFF			
	<b>Pulse Mode</b>		<b>Other Mode</b>						
★ 1 pulse / THB 10	MDB Mode							OFF	OFF
★ 5 pulses / THB 10	ICT002U Mode							OFF	ON
★ 10 pulses / THB 10	ICT104U Mode							ON	OFF
★ 20 pulses / THB 10	ICT104V Mode							ON	ON

★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note: 1. Calibration card is needed.

2. High acceptance mode will increasing accepting rate, however, it will reduce the security level of Bill Acceptor.

This dip switch is located on the CPU board, remove the CPU board cover first.

