


## XBA-TWD4 Option Switch Settings

Supported bill \$ 100, 200, 500, 1000 4bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reject \$ 100	ON							
★	Accept \$ 100	OFF							
★	Reject \$ 200		ON						
★	Accept \$ 200		OFF						
★	Reject \$ 500			ON					
★	Accept \$ 500			OFF					
★	Reject \$ 1000				ON				
★	Accept \$ 1000				OFF				
★	Reserved				ON				
★	Reserved				OFF				
★	Disable Bill Reject 4 Times BA Stop By 30 Sec					ON			
★	Enable Bill Reject 4 Times BA Stop By 30 Sec					OFF			
★	Stack Banknote when Power-up						ON		
★	Reject Banknote when Power-up						OFF		
★	Reserved							ON	
★	Reserved							OFF	

This dip switch is located at the side of XBA.

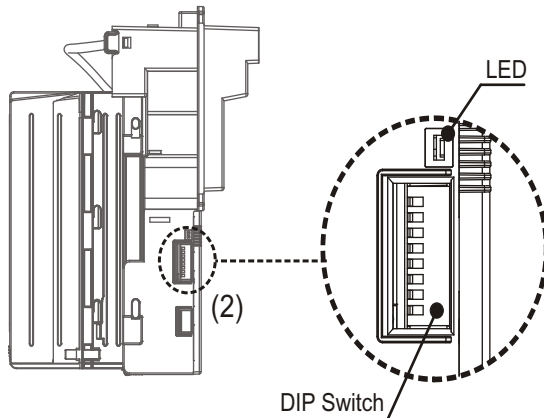


### Currency Assign Data

Interface Bill value	ICT002U	Parallel A3	ICT104V	Pulse	MDB
BV1	\$ 100	\$ 100	\$ 100	\$ 100	\$ 100
BV2	\$ 200	\$ 200	\$ 200	\$ 200	\$ 200
BV3	\$ 500	\$ 500	\$ 500	\$ 500	\$ 500
BV4	\$ 1000	\$ 1000	\$ 1000	\$ 1000	\$ 1000

## XBA-TWD4 (Pulse/MDB/ICT104U/GPT/ICT104V)

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
	Inhibit Active HIGH	ON							
★	Inhibit Active LOW	OFF							
	Reserved	ON							
★	Reserved	OFF							
	Reserved		ON						
★	Reserved		OFF						
	Reserved			ON					
★	Reserved			OFF					
	<b>Pulse Mode</b>	<b>Other Mode</b>							
★	Credit-Pulse Normal HIGH	★ SCALING_FACTOR 100 DECIMAL_PLACE_OFF 2				ON			
	Credit-Pulse Normal LOW	SCALING_FACTOR 1 DECIMAL_PLACE_OFF 0				OFF			
★	Pulse Mode						ON		
	Other Mode						OFF		
	<b>Pulse Mode</b>	<b>Other Mode</b>							
★	1 pulse / \$ 100	MDB Mode						OFF	OFF
	5 pulse / \$ 100	Parallel A3 Mode						OFF	ON
	10 pulse / \$ 100	ICT104U Mode						ON	OFF
	25 pulse / \$ 100	ICT104V Mode						ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

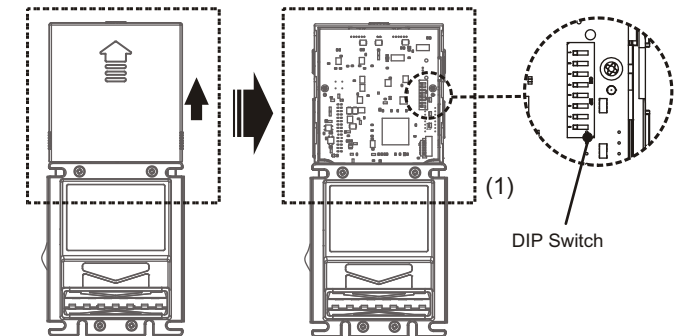

★ Manufacture setting

Note : 1.After setting dip switch of the credit pulses, you should reset the bill acceptor again.  
2.Not calibrate card.