


XBA-TXY6(TRY3+USD2+EUR1) Option Switch Settings

Supported bill **Lira** **5, 10, 20,** **3bills.**
 USD **1, 5** **2bills.**
 EUR **5** **1bills.**

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject Lira 5 & 10	ON							
★ Accept Lira 5 & 10	OFF							
★ Reject Lira 20		ON						
★ Accept Lira 20		OFF						
★ Reject € 5			ON					
★ Accept € 5			OFF					
★ Reject USD 1				ON				
★ Accept USD 1				OFF				
★ Reject USD 5					ON			
★ Accept USD 5					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec					ON			
★ Enable Bill Reject 4 Times BA Stop By 30 Sec					OFF			
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

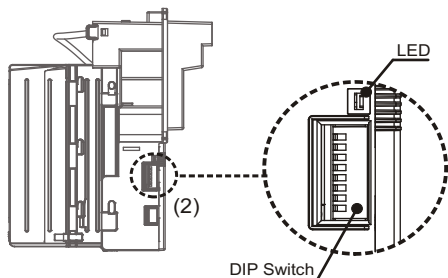


Currency Assign Data

Interface Bill value	ICT104U	GPT	ICT104V	Pulse	MDB
BV1	Lira 5	Lira 5	Lira 5	Lira 5	Lira 5
BV2	Lira 10	Lira 10	Lira 10	Lira 10	Lira 10
BV3	Lira 20	Lira 20	Lira 20	Lira 20	Lira 20
BV4	Euro 5	Euro 5	Euro 5	Euro 5	Euro 5
BV5	USD 1		USD 1	USD 1	USD 1
BV6	USD 5		USD 5	USD 5	USD 5

XBA-TXY6(TRY3+USD2+EUR1)(Pulse/MDB/ICT104U/GPT/ICT104V)

FUNCTION		SW1	SW2	SW3	SW4	SW5		SW6	SW7	SW8
★	Inhibit Active HIGH	ON								
	Inhibit Active LOW	OFF								
★	Reserved		ON							
	Reserved		OFF							
★	Reserved			ON						
	Reserved			OFF						
★	Reserved				ON					
	Reserved				OFF					
Pulse Mode		MDB Mode			ICT104V Mode					
★	Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2			Connect with coin changer		ON			
	Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0			Connect with ICT VCCS converter board		OFF			
★	Pulse Mode							ON		
	Other Mode							OFF		
★	Pulse Mode	Other Mode								
	1 pulse / Lira 1	MDB Mode								
	5 pulse / Lira 1	GPT Mode								
	10 pulse / Lira 1	ICT104U Mode								
	25 pulse / Lira 1	ICT104V Mode								

This dip switch is located on the CPU board, remove the CPU board cover first.

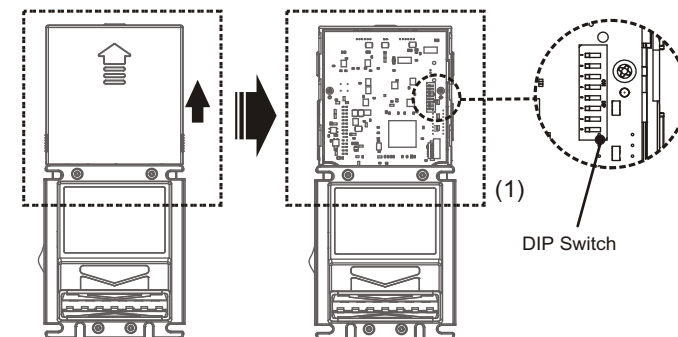

★ Manufacture setting

Note : 1.Please reset the bill acceptor after set the dip switch.
 2.Dip switches 1 to 5 are only used for pulse protocol.
 3.Calibrate card.
 EUR \$5 display TRY 30 (Only for Pulse,MDB)
 USD \$1 display TRY 5 (Only for Pulse,MDB)
 USD \$5 display TRY 25 (Only for Pulse,MDB)