


XBA-(CNY6+HKD4+MOP4) Option Switch Settings

Supported bill CNY 1, 5, 10, 20, 50, 100 6bills.
 HKD 10, 20, 50, 100 4bills.
 MOP 10, 20, 50, 100 4bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
	Reject CNY 1 & 5	ON							
★	Accept CNY 1 & 5	OFF							
	Reject CNY、HKD、MOP 10		ON						
★	Accept CNY、HKD、MOP 10		OFF						
	Reject CNY、HKD、MOP 20			ON					
★	Accept CNY、HKD、MOP 20			OFF					
	Reject CNY、HKD、MOP 50				ON				
★	Accept CNY、HKD、MOP 50				OFF				
	Reject CNY、HKD、MOP 100					ON			
★	Accept CNY、HKD、MOP 100					OFF			
	Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★	Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
	Stack Banknote when Power-up							ON	
★	Reject Banknote when Power-up							OFF	
	Reserved								ON
★	Reserved								OFF

This dip switch is located at the side of XBA.

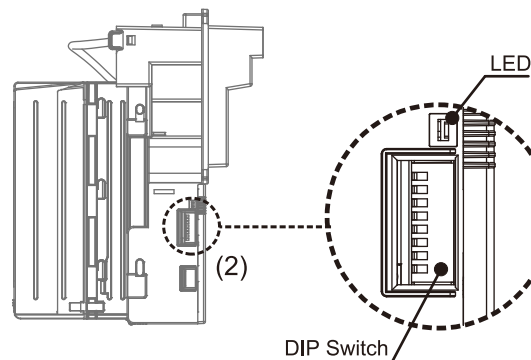


Currency Assign Data

Interface Bill Value	ICT002U	ICT104U	ICT104V	Pulse	MDB
BV1	1	1	1	1	1
BV2	5	5	5	5	5
BV3	10	10	10	10	10
BV4	20	20	20	20	20
BV5	50	50	50	50	50
BV6	100	100	100	100	100

XBA-(CNY6+HKD4+MOP4)(Pulse/MDB/ICT002U/ICT104U/ICT104V)

FUNCTION		SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Inhibit Active HIGH	ON							
	Inhibit Active LOW	OFF							
	Reserved								
	Reserved		OFF	ON					
	Reserved		OFF						
	Reserved		ON						
	Reserved		OFF	ON					
	Reserved		OFF	OFF					
Pulse Mode		MDB Mode		ICT104V Mode					
★	Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer		ON			
	Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT JPSTD converter board		OFF			
★	Pulse Mode						ON		
	Other Mode						OFF		
★	Pulse Mode		Other Mode						
	1 pulse / CNY 1		MDB Mode					OFF	OFF
	5 pulse / CNY 1		ICT002U Mode					OFF	ON
	10 pulse / CNY 1		ICT104U Mode					ON	OFF
	25 pulse / CNY 1		ICT104V Mode					ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

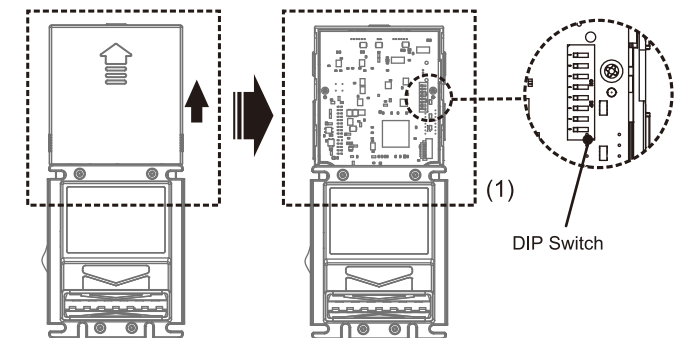

★ Manufacture setting

Note : (1) Please reset the bill acceptor after setting the dip switch.
 (2) Calibration card is needed.
 (3) 1 CNY = 1 HKD = 1 MOP