

XBA-GBP2 Option Switch Settings

Supported bill

England banknotes : England £ 5, £ 10

Scotland banknotes:

Bank of Scotland & Clydesdale Bank & Royal Bank £ 5, £ 10


Northern Ireland banknotes:

Bank of Ireland & Ulster Bank & Northern Bank &

Danske Bank & First Trust Bank £ 5, £ 10

| FUNCTION | SW1 | SW2 | SW3 | SW4 | SW5 | SW6 | SW7 | SW8 |
|---|-----|-----|-----|-----|-----|-----|-----|-----|
| ★ Reject England & Scotland & Northern Ireland £ 5 | ON | | | | | | | |
| ★ Accept England & Scotland & Northern Ireland £ 5 | OFF | | | | | | | |
| ★ Reject England & Scotland & Northern Ireland £ 10 | | ON | | | | | | |
| ★ Accept England & Scotland & Northern Ireland £ 10 | | OFF | | | | | | |
| ★ Reserved | | | ON | | | | | |
| ★ Reserved | | | OFF | | | | | |
| ★ Reserved | | | | ON | | | | |
| ★ Reserved | | | | OFF | | | | |
| ★ Reserved | | | | | ON | | | |
| ★ Reserved | | | | | OFF | | | |
| ★ Disable Bill Reject 4 Times BA Stop By 30 Sec | | | | | | ON | | |
| ★ Enable Bill Reject 4 Times BA Stop By 30 Sec | | | | | | OFF | | |
| ★ Stack Banknote when Power-up | | | | | | | ON | |
| ★ Reject Banknote when Power-up | | | | | | | OFF | |
| ★ Reserved | | | | | | | | ON |
| ★ Reserved | | | | | | | | OFF |

This dip switch is located at the side of XBA.

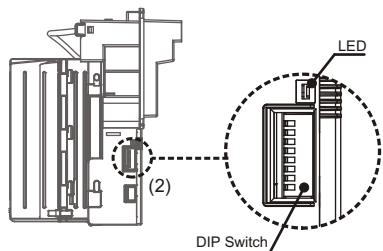


Currency Assign Data

| Interface Bill value | GPT | ICT104U | ICT104V | Pulse | MDB |
|-------------------------|------|---------|---------|-------|------|
| BV1 | £ 5 | £ 5 | £ 5 | £ 5 | £ 5 |
| BV2 | £ 10 | £ 10 | £ 10 | £ 10 | £ 10 |

XBA-GBP2 (Pulse/MDB/ICT104U/GPT/ICT104V)

| FUNCTION | SW1 | SW2 | SW3 | SW4 | SW5 | SW6 | SW7 | SW8 |
|----------------------------|---|-------------------|-----|--|---------------------|-----|-----|-----|
| ★ Inhibit Active HIGH | ON | | | | | | | |
| ★ Inhibit Active LOW | OFF | | | | | | | |
| ★ Reserved | | ON | | | | | | |
| ★ Reserved | | OFF | | | | | | |
| ★ Reserved | | | ON | | | | | |
| ★ Reserved | | | OFF | | | | | |
| ★ Reserved | | | | ON | | | | |
| ★ Reserved | | | | OFF | | | | |
| Pulse Mode | | MDB Mode | | | ICT104V Mode | | | |
| ★ Credit-Pulse Normal HIGH | Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2 | | | Connect with coin changer | | | ON | |
| ★ Credit-Pulse Normal LOW | Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0 | | | Connect with ICT VCCS converter board | | | OFF | |
| ★ Pulse Mode | | | | | | | ON | |
| ★ Other Mode | | | | | | | OFF | |
| Pulse Mode | | Other Mode | | | | | | |
| ★ 1 pulse / £ 5 | MDB Mode | | | | | | OFF | OFF |
| ★ 5 pulse / £ 5 | GPT Mode | | | | | | OFF | ON |
| ★ 10 pulse / £ 5 | ICT104U Mode | | | | | | ON | OFF |
| ★ 25 pulse / £ 5 | ICT104V Mode | | | | | | ON | ON |

This dip switch is located on the CPU board, remove the CPU board cover first.

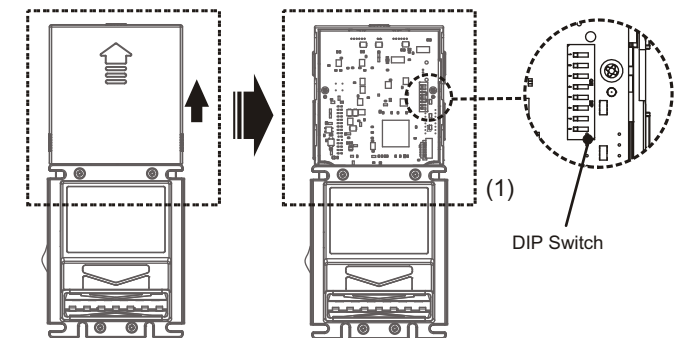

★ Manufacture setting

- Note :
- 1.Please reset the bill acceptor after set the dip switch.
 - 2.Dip switches 1 to 5 are only used for pulse protocol.
 - 3.Calibrate card.