


XBA-MED10(MKD4+EUR6) Option Switch Settings

Supported bill MKD 10, 50, 100, 200 4bills.
 € 5, 10, 20, 50, 100, 200 6bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject MKD 10 & 50	ON							
★ Accept MKD 10 & 50	OFF							
★ Reject MKD 100 & 200		ON						
★ Accept MKD 100 & 200		OFF						
★ Reject € 5 & 10			ON					
★ Accept € 5 & 10			OFF					
★ Reject € 20 & 50				ON				
★ Accept € 20 & 50				OFF				
★ Reject € 100(2019) & 200(2019)					ON			
★ Accept € 100(2019) & 200(2019)					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Test Mode (Pulse only)								ON
★ Operation Mode								OFF

This dip switch is located at the side of XBA.

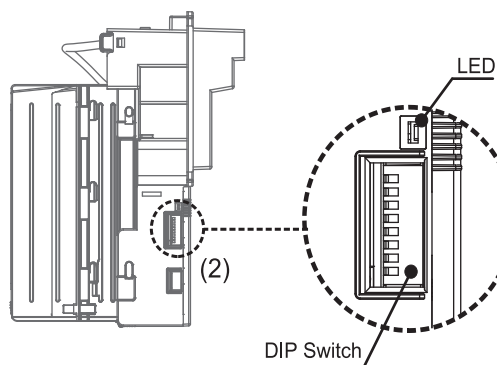

Currency Assign Data

Interface Bill value	ICT104U	ICT104V	Pulse	MDB
BV1	MKD 10	MKD 10	MKD 10	MKD 10
BV2	MKD 50	MKD 50	MKD 50	MKD 50
BV3	MKD 100	MKD 100	MKD 100	MKD 100
BV4	MKD 200	MKD 200	MKD 200	MKD 200
BV5	€ 5	€ 5	€ 5	€ 5
BV6	€ 10	€ 10	€ 10	€ 10
BV7	€ 20	€ 20	€ 20	€ 20
BV8	€ 50	€ 50	€ 50	
BV9	€ 100	€ 100	€ 100	
BV10	€ 200	€ 200	€ 200	

XBA-MED10(MKD4+EUR6) (Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ Reserved		ON						
★ Reserved		OFF						
★ 50ms LO / 50ms HI			OFF	OFF				
60ms LO / 300ms HI			ON	OFF				
30ms LO / 50ms HI			OFF	ON				
150ms LO / 150ms HI			ON	ON				
Pulse Mode	MDB Mode			ICT104V Mode				
★ Credit-Pulse Normal HIGH	Scaling Factor (SF)= 100 Decimal Point Position (DPP)= 2			Connect with coin changer			ON	
Credit-Pulse Normal LOW	Scaling Factor (SF)= 1 Decimal Point Position (DPP)= 0			Connect with ICT VCCS converter board			OFF	
★ Pulse Mode							ON	
★ Other Mode							OFF	
Pulse Mode	Other Mode							
★ 1 pulse / MKD 10	MDB Mode						OFF	OFF
2 pulses / MKD 10	Reserved						OFF	ON
5 pulses / MKD 10	ICT104U Mode						ON	OFF
10 pulses / MKD 10	ICT104V Mode						ON	ON

★ Manufacture setting

Note :

1. Please reset the bill acceptor after set the dip switch.
2. Dip switches 1 to 5 are only used for pulse protocol.
3. Calibrate card is needed.
4. The transaction Record can be saved by USB MSD(only for EX series)
5. EUR \$5 display MKD 31 (Only for Pulse)
 EUR \$10 display MKD 62 (Only for Pulse)
 EUR \$20 display MKD 124 (Only for Pulse)
 EUR \$50 display MKD 310 (Only for Pulse)
 EUR \$100 display MKD 620 (Only for Pulse)
 EUR \$200 display MKD 1240 (Only for Pulse)
6. EUR \$5 display MKD 310 (Only for MDB)
 EUR \$10 display MKD 620 (Only for MDB)
 EUR \$20 display MKD 1240 (Only for MDB)

This dip switch is located on the CPU board, remove the CPU board cover first.

