


XBA-REN11 Option Switch Settings

Supported bill RON 1, 5, 10, 20, 50 5bills.
 € 5, 10, 20, 50, 100, 200 6bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject RON 1 & 5	ON							
★ Accept RON 1 & 5	OFF							
★ Reject RON 10 & 20 & 50		ON						
★ Accept RON 10 & 20 & 50		OFF						
★ Reject € 5 & 10			ON					
★ Accept € 5 & 10			OFF					
★ Reject € 20 & 50				ON				
★ Accept € 20 & 50				OFF				
★ Reject € 100(2019) & 200(2019)					ON			
★ Accept € 100(2019) & 200(2019)					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

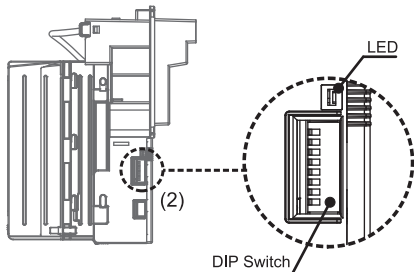

Currency Assign Data

Interface	ICT104U	ICT104V	Pulse	MDB
BV1	RON 1	RON 1	RON 1	RON 1
BV2	RON 5	RON 5	RON 5	RON 5
BV3	RON 10	RON 10	RON 10	RON 10
BV4	RON 50	RON 50	RON 50	RON 50
BV5	€ 5	€ 5	€ 5	€ 5
BV6	€ 10	€ 10	€ 10	€ 10
BV7	€ 20	€ 20	€ 20	€ 20
BV8	€ 50	€ 50	€ 50	€ 50
BV9	€ 100	€ 100	€ 100	
BV10	€ 200	€ 200	€ 200	
BV11	RON 20	RON 20	RON 20	RON 20

Appendix

XBA-REN11 (Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
Inhibit Active HIGH	ON								
★ Inhibit Active LOW	OFF								
★ Reserved		ON							
★ Reserved		OFF							
★ Reserved			ON						
★ Reserved			OFF						
★ Reserved				ON					
★ Reserved				OFF					
Pulse Mode		MDB Mode			ICT104V Mode				
★ Credit-Pulse Normal HIGH	Scaling Factor (SF)= 100 Decimal Point Position (DPP)= 2			Connect with coin changer		ON			
★ Credit-Pulse Normal LOW	Scaling Factor (SF)= 1 Decimal Point Position (DPP)= 0			Connect with ICT VCCS converter board		OFF			
★ Pulse Mode						ON			
★ Other Mode						OFF			
Pulse Mode		Other Mode							
★ 1 pulse / RON 1	MDB Mode						OFF	OFF	
★ 2 pulses / RON 1	Reserved						OFF	ON	
★ 10 pulses / RON 1	ICT104U Mode						ON	OFF	
★ 20 pulses / RON 1	ICT104V Mode						ON	ON	

★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note :

1. Please reset the bill acceptor after set the dip switch.
2. Dip switches 1 to 5 are only used for pulse protocol.
3. Calibration card is needed.
4. The transaction Record can be saved by USB MSD (only for EX series)
5. EUR \$5 display RON 20 (Only for Pulse, MDB)
 EUR \$10 display RON 40 (Only for Pulse, MDB)
 EUR \$20 display RON 80 (Only for Pulse, MDB)
 EUR \$50 display RON 200 (Only for Pulse, MDB)
 EUR \$100 display RON 400 (Only for Pulse)
 EUR \$200 display RON 800 (Only for Pulse)

This dip switch is located on the CPU board, remove the CPU board cover first.

