


XBA-TEY12(TRY6+EUR6) Option Switch Settings

Supported bill Lira 5, 10, 20, 50, 100, 200 6bills.
 EUR 5, 10, 20, 50, 100, 200 6bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject Lira 5 & 10 & 20	ON							
★ Accept Lira 5 & 10 & 20	OFF							
★ Reject Lira 50 & 100 & 200		ON						
★ Accept Lira 50 & 100 & 200		OFF						
★ Reject € 5 & 10			ON					
★ Accept € 5 & 10			OFF					
★ Reject € 20 & 50				ON				
★ Accept € 20 & 50				OFF				
★ Reject € 100(2019) & 200(2019)					ON			
★ Accept € 100(2019) & 200(2019)					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

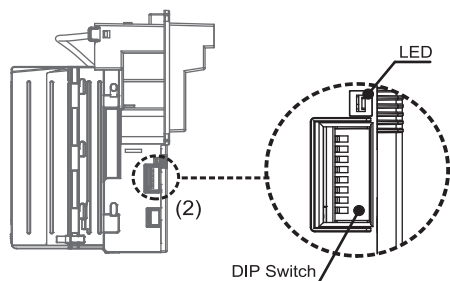

Currency Assign Data

Interface Bill Value	ICT104U	ICT104V	Pulse	MDB
BV1	Lira 5	Lira 5	Lira 5	Lira 5
BV2	Lira 10	Lira 10	Lira 10	Lira 10
BV3	Lira 20	Lira 20	Lira 20	Lira 20
BV4	Lira 50	Lira 50	Lira 50	Lira 50
BV5	Lira 100	Lira 100	Lira 100	Lira 100
BV6	Lira 200	Lira 200	Lira 200	Lira 200
BV7	Euro 5	Euro 5	Euro 5	Euro 5
BV8	Euro 10	Euro 10	Euro 10	Euro 10
BV9	Euro 20	Euro 20	Euro 20	Euro 20
BV10	Euro 50	Euro 50	Euro 50	Euro 50
BV11	Euro 100	Euro 100	Euro 100	Euro 100
BV12	Euro 200	Euro 200	Euro 200	Euro 200

XBA-TEY12(TRY6+EUR6)(Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ Reserved		ON						
★ Reserved		OFF						
★ Reserved			ON					
★ Reserved			OFF					
★ Reserved				ON				
★ Reserved				OFF				
Pulse Mode		MDB Mode		ICT104V Mode				
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 10 Decimal Point Position (DPP) = 1		★ Connect with coin changer		ON			
Credit-Pulse Normal LOW	★ Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT VCCS converter board		OFF			
★ Pulse Mode							ON	
Other Mode							OFF	
Pulse Mode		Other Mode						
★ 1 pulse / Lira 5	MDB Mode						OFF	OFF
5 pulses / Lira 5	Reserved						OFF	ON
10 pulses / Lira 5	ICT104U Mode						ON	OFF
25 pulses / Lira 5	ICT104V Mode						ON	ON

★ Manufacture setting

Note :

1. Please reset the bill acceptor after set the dip switch.
2. Dip switches 1 to 5 are only used for pulse protocol.
3. Calibration card is needed.
4. The transaction Record can be saved by USB MSD (only for EX series)
5. EUR \$5 display TRY 30 (Only for Pulse, MDB)
 EUR \$10 display TRY 60 (Only for Pulse, MDB)
 EUR \$20 display TRY 120 (Only for Pulse, MDB)
 EUR \$50 display TRY 300 (Only for Pulse, MDB)
 EUR \$100 display TRY 600 (Only for Pulse, MDB)
 EUR \$200 display TRY 1200 (Only for Pulse, MDB)

This dip switch is located on the CPU board, remove the CPU board cover first.

