


XBA-RON5 Option Switch Settings

Supported bill RON 1, 5, 10, 20, 50 5bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject RON 1	ON							
★ Accept RON 1	OFF							
★ Reject RON 5		ON						
★ Accept RON 5		OFF						
★ Reject RON 10			ON					
★ Accept RON 10			OFF					
★ Reject RON 20				ON				
★ Accept RON 20				OFF				
★ Reject RON 50					ON			
★ Accept RON 50					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Test Mode (Pulse only)								ON
★ Operation Mode								OFF

This dip switch is located at the side of XBA.

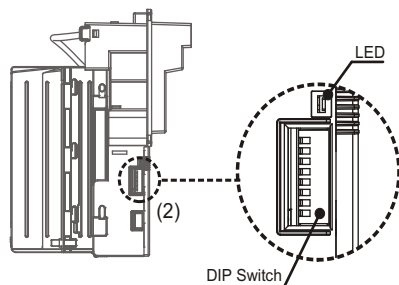


Currency Assign Data

Interface Bill value	ICT104U	ICT104V	Pulse	MDB
BV1	RON 1	RON 1	RON 1	RON 1
BV2	RON 5	RON 5	RON 5	RON 5
BV3	RON 10	RON 10	RON 10	RON 10
BV4	RON 50	RON 50	RON 50	RON 50
BV5	RON 20	RON 20	RON 20	RON 20

XBA-RON5 (Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ Reserved		ON						
★ Reserved		OFF						
★ 50ms LO / 50ms HI			OFF	OFF				
★ 50ms LO / 100ms HI			OFF	ON				
★ 65ms LO / 75ms HI			ON	OFF				
★ 100ms LO / 150ms HI			ON	ON				
	Pulse Mode		MDB Mode		ICT104V Mode			
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer		ON			
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT VCCS converter board		OFF			
★ Pulse Mode					ON			
★ Other Mode					OFF			
	Pulse Mode		Other Mode					
★ 1 pulse / RON 1	MDB Mode					OFF	OFF	
★ 2 pulse / RON 1	Reserved					OFF	ON	
★ 10 pulse / RON 1	ICT104U Mode					ON	OFF	
★ 20 pulse / RON 1	ICT104V Mode					ON	ON	

This dip switch is located on the CPU board, remove the CPU board cover first.

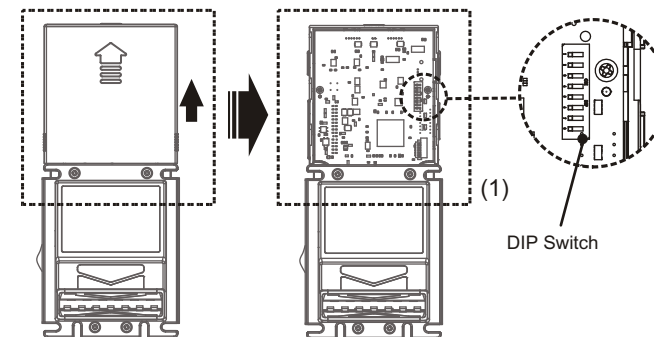

★ Manufacture setting

Note : 1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
2. Calibration card is needed.